

autostone usa



Hyundai GDSI 2.0

Tile Technical Specifications

Website: AutoStoneUSA.com/Hyundai

Email: hyundai@autostoneusa.com




MADE IN AMERICA



AutoStoneUSA.com

© 2026 AutoStone Floor Systems, All Rights Reserved.

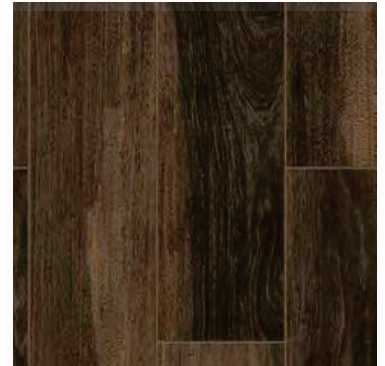



CT-1 Showroom

Series: American Made!

Color: American Harvest..

Finish: Natural | Honed | BrightFinish



(BrightFinish is a permanent sealant to aid cleaning practices) Helps dealership retail facilities remain in a "like new" appearance for life of facility.

Size: 12" x 24" x 9 mm thick - (US nominal dimensions)

- for customer restroom walls & floors.



MADE in USA

NOTE: AUTOSTONEUSA CT-1 TILE FOR HYUNDAI IS RECTIFIED WITH MICRO-BELVELS FOR TIGHT GROUT ALIGNMENT. RECOMMENDED GROUT JOINTS: 1/8" - 3/16" (maximum width).



CTB-1 Base

Series: American Made!

Color: American Harvest.2

Finish: Natural | Honed

Size: 03" x 12" x 8 mm (U.S. Nominal Dimension)



technical specifications

ANSI A326.3 Declared Use:

4.1.1 Interior, Dry (ID)

4.1.2 Interior Wet (IW)

SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in



V2
SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern with similar colors.



CT-1 Showroom

Series: American Made!

Color: American Harvest.2

Finish: Natural | Honed | BrightFinish



(BrightFinish is a permanent sealant to aid cleaning practices) Helps dealership retail facilities remain in a "like new" appearance for life of facility.



MADE in USA

Size: 24" x 48" x 8 mm thick - (US nominal dimensions)
- for showroom floors (not customer restroom floors or walls).

NOTE: AUTOSTONEUSA CT-1 TILE FOR HYUNDAI IS RECTIFIED WITH MICRO-BELVELS FOR TIGHT GROUT ALIGNMENT. RECOMMENDED GROUT JOINTS: 1/8" - 3/16" (maximum width).



CTB-1 Base

Series: American Made!

Color: American Harvest.2

Finish: Natural | Honed


Size: 03" x 24" x 8 mm (U.S. Nominal Dimension)



ANSI A326.3 Declared Use:

- 4.1.1 Interior, Dry (ID)
- 4.1.2 Interior Wet (IW)

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

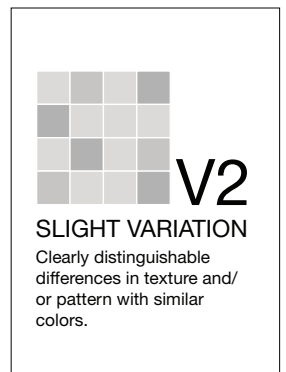

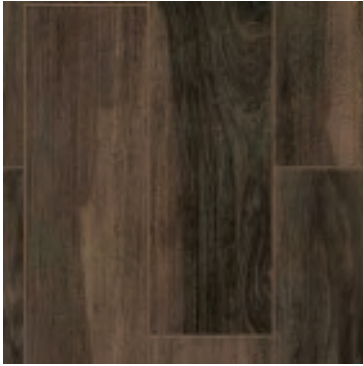

CT-6 Customer Lounge Tile

Series: American Wood
Color: Walnut
Finish: Natural | Honed
Size: 06" x 36" x 8 mm (thick) (U.S. Nominal Dimensions)

CTB-2 Base

Series: American Made!
Color: American Wood
Finish: Natural | Honed
Size: 06" x 36" x 8 mm thick (U.S. Nominal Dimensions)



MADE in USA




ANSI A326.3 Declared Use:
 4.1.1 Interior, Dry (ID)
 4.1.2 Interior Wet (IW)

technical specifications

ANSI A326.3 Declared Use:

4.1.1 Interior, Dry (ID)
 4.1.2 Interior Wet (IW)

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in



MODERATE VARIATION

Notable differences in color and pattern, creating a dynamic look

EnviroShop12usa
smarter, better workshops



MADE in USA



Product Use Category 4.1.3. Interior, Wet Plus (IW+)

Series: [Envirosho.....](#)
Color: Alloy Grey
Finish: Brightfinish
Surface: Traction.Brightfinish
Size: 12" x 12" x 9 mm
(U.S. Nominal Dimensions)

Series: [Enviroshop12USA](#)
Color: Carbon Black
Finish: Brightfinish
Surface: Traction.Brightfinish
Size: 12" x 12" x 9 mm
(U.S. Nominal Dimensions)

4.1.3 Interior, Wet Plus (IW+) Evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop is medium traction surface. For interior applications, with good drainage. Floors walked on when wet if level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.


DCOF Meets and exceeds .50 DCOF rating as required for ANSI A326 4.1.3 (IW+)

ANSI A326.3 Category: 4.1.3 Interior, Wet Plus (IW+)

ANSI A326.3 Declared Use:
4.1.3 Interior, Wet Plus (IW+)

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.3 IW+ (Interior, Wet)	≥0.50 DCOF WET	≥0.50 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in




V2
SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern with similar colors.

DriveSeries12USA

advanced surface technology



MADE in USA



Series: DriveSeries12USA
Color: Alloy Grey
Finish: Super.Grip3L.Brightfinish
Size: 12"x 12" x 9 mm
 *(U.S. Nominal Dimension)

Series: DriveSeries12USA
Color: Carbon Black
Finish: Super.Grip3L.Brightfinish
Size: 12"x 12" x 9mm
 *(U.S. Nominal Dimension)

ANSI A326.3 Category: 4.1.3 Interior, Wet Plus (IW+)
 4.1.4 Exterior Wet (EW)
 4.1.5 Oils/Grease (O/G)

Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard. **DCOF** - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet and 4.1.5 Oils / Grease.

ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in


V2
SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern with similar colors.

Note: Made in USA



MADE in USA



Series: eShop08USA
Color: Alloy Grey
Finish: Super.Grip.Brightfinish
Size: 08"x 08" x 10 mm
 *(U.S. Nominal Dimension)

Series: eShop08USA
Color: Genesis Carbon Black
Finish: Super.Grip.Brightfinish
Size: 08"x 08" x 10 mm
 *(U.S. Nominal Dimension)

ANSI A326.3 Category: 4.1.3 Interior, Wet Plus (IW+)
 4.1.4 Exterior Wet (EW)
 4.1.5 Oils/Grease (O/G)

Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.


DCOF - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet and 4.1.5 Oils / Grease.

ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+)- and - 4.1.5 Oils/Grease (O/G)


technical specifications

SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

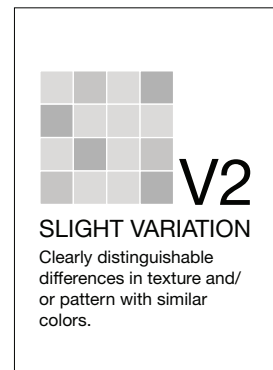



MADE in USA



Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.

DCOF - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet and 4.1.5 Oils / Grease.

ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+)- and - 4.1.5 Oils/Grease (O/G)


Series: DriveSeries08USA
Color: Alloy Grey
Finish: Super.Grip3L.Brightfinish
Size: 08"x 08" x 10 mm
 *(U.S. Nominal Dimension)


Series: DriveSeries08USA
Color: Genesis Carbon Black
Finish: Super.Grip3L.Brightfinish
Size: 08"x 08" x 10 mm
 *(U.S. Nominal Dimension)

ANSI A326.3 Category: 4.1.3 Interior, Wet Plus (IW+)
 4.1.4 Exterior Wet (EW)
 4.1.5 Oils/Grease (O/G)

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

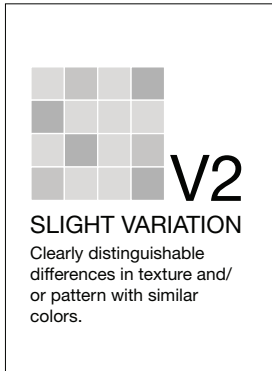




Restroom & Tech Walls

Color: Simply White

Finish: Satin

Nominal Size: 12" x 24" (nominal)

Actual Size: 11 13/16" x 23 10/16"















Color: Stormy Grey

Finish: Glossy

Nominal Size: 12" x 24" (nominal)


Actual Size: 11 13/16" x 23 10/16"

TECHNICAL SPECIFICATIONS


	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Wall Tiles

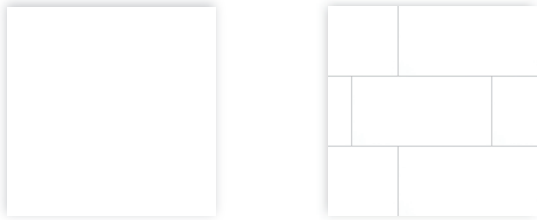

Series: Premier
Color: Bright White Ice
Finish: Glossy
Size: 3" x 6" or 6" x 6" and 12" x 24"
Product Code (3" x 6"):
 WT-1 (Alternate)
Product Code (6" x 6"):
 WT-3 (Alternate)
Product Code (12" x 24"):
 WT-3 (Alternate)



technical specifications

Declared Use: Wall Tile Only - Glazed Surface Wall Tile

TECHNICAL SPECIFICATIONS

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AutoStoneUSA Results	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	CERTIFIED PORCELAIN TILE <small>0.5% or less water absorption</small>	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	















Service & Tech Restroom Areas Wall Tile

Series: ShopWall!
Color: Granita Grey
Finish: Satin
Size: 8" X 8" U.S. Nominal Dimensions .



Service & Tech Restroom Areas Wall Tile

Series: ShopWall!
Color: Anthracite Grey
Finish: Satin
Size: 8" X 8" U.S. Nominal Dimensions .

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft ²	8mm ≥300 lb/ft ² 10mm ≥400 lb/ft ²
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

AutoStoneUSA Support Team Members Email & Phone




Program Email: hyundai@autostoneusa.com

Program Phone: 214-393-4875

Hyundai Brand Page:

Website: www.autostoneusa.com/rfq-hyundai

Click Image Below to Access Hyundai Website:

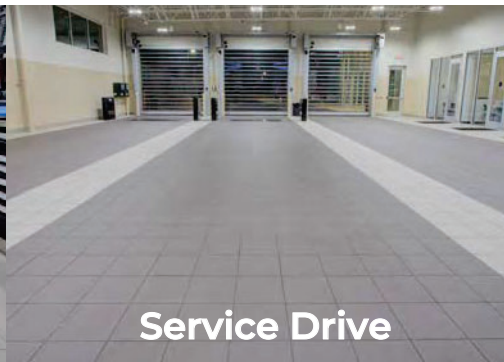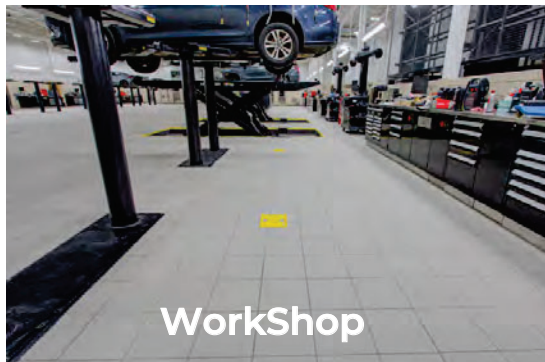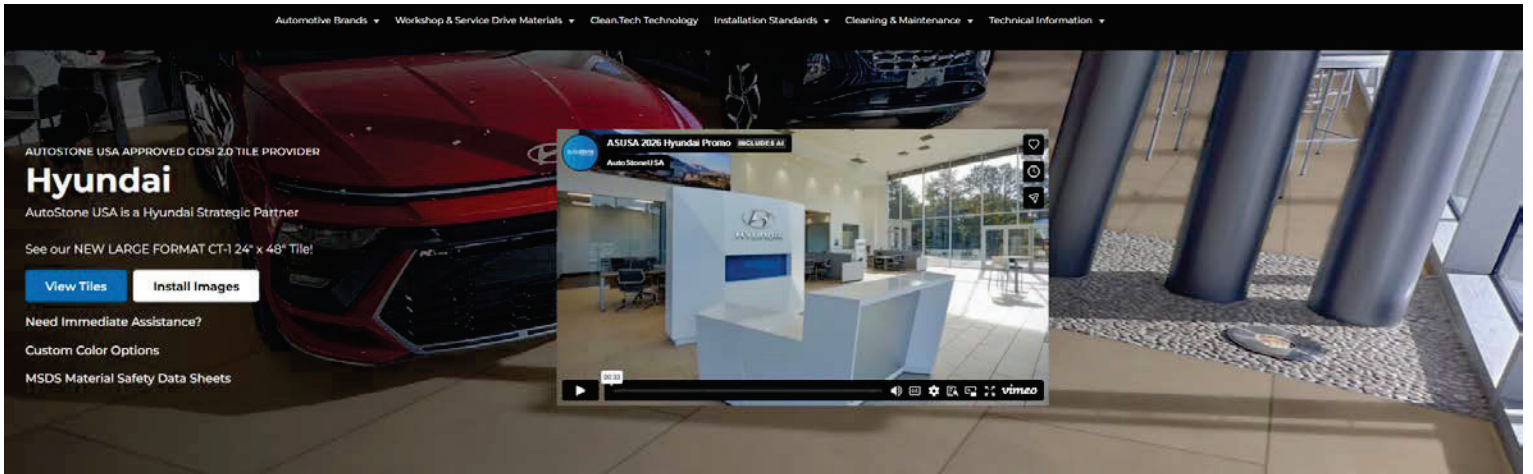

autostone usa