

Drawing Modification F125 (Partial Coverage)

SURE SET is a superior polymer fortified cementitious thin-set which eliminates the need for back buttering large format tile and stone.

Thinsets:

-LHT Plus

Crack-Isolation Membranes:

-Fracture Ban SC by Laticrete

Grouts:

-PERMACOLOR®

-PERMACOLOR SELECT®




Ceramic Tile:

AutoStone: Driveseries, Enviroshop, & Clinkershop

CJ Control Joint:

Service Drive: AS pre-fabricated extruded metal joint.

WorkShop: AS pre-fabricated extruded metal joint

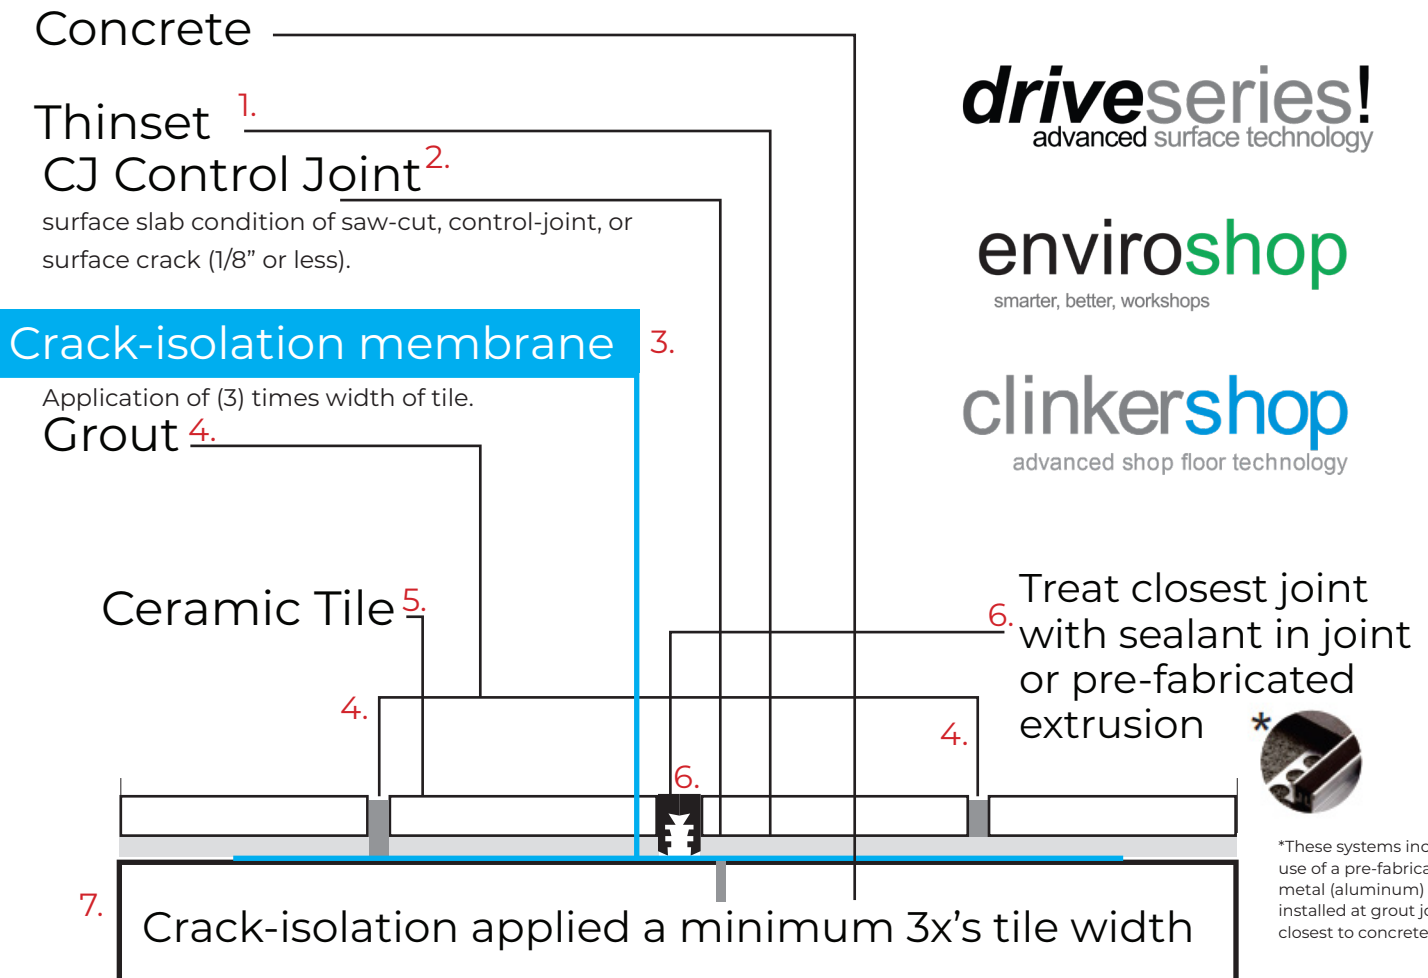

Crack Isolation (partial coverage): Apply an appropriate coat of Fracture Ban SC by Laticrete. ^{7.} The crack suppression must be applied at a minimum of 3 times the width of the tile or stone being installed. Follow TCNA Method F125 for the treatment of hairline cracks, shrinkage cracks, and saw cut or control joints (see above).

Not intended for use over structural cracks, in-plane cracks beyond the limits or where vertical out-of-plane movement occurs.