



# Enviroshop Guide Book

*2021 Edition*


---

Contains tile specifications including thickness,  
grout material matching, and more.

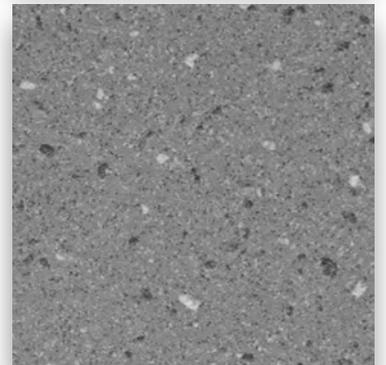


# enviroshop

smarter, better, workshops



Smoke Grey

12" x 12"\*



Alloy Grey

12" x 12"\*



Carbon Black

12" x 12"\*

\* = U.S. Nominal Dimension

12" x 12" (U.S. Nominal Dimension) = 11 7/8" x 11 7/8" (Actual Size)

## Sizing

Enviroshop is a rectified dimensionally so every tile is the exact dimension. Dimensions may vary within (+) or (-) 2mm in sizing.

## Description

A permanent enhanced porcelain technology floor tile and system for use in automotive workshop and climate controlled service drive environments. For interior environments only.

### Advantages

- 1. Our original workshop floor with textured surface.
- 2. Surface texture is elevated above the surface bed for easier cleaning.
- 3. Will not permanently stain or darken when properly cleaned.
- 4. This product has:

**slipresistant**  
textured floor surfaces

### Manufacturer

AutoStone Floor Systems

### Uses

Evaluate for use in automotive workshop and climate controlled service drive environments with high speed doors. Consult with your architect to determine dealership practices and use.

### DCOF

Meets and exceeds .42 DCOF rating as required for ANSI A326.3



## brightfinish

ultra-cleanable technology

### Brightfinish Ultra-Cleanable Technology

Brightfinish is a permanent sealant baked-in during kiln-firing process. The Brightfinish permanent sealant aids dealership with their cleaning practices by sealing surface micropores which trap and hold-on to rubber transfer, grease, oil or other contaminants.



### Enhanced Impervious Surface Technology

An impervious tile is the highest performance standard in the porcelain tile industry. The definition of an impervious tile is a surface that absorbs moisture between 0.5% to 0.001%. At AutoStone, we think that 0.5% is too much absorbency, and in an automotive dealership will cause tiles to absorb oil, grease, petroleum, gasoline and other contaminants. When this happens, your tile surface will darken over use and this leads to potential hazards such as STF (slip, trip and fall) events. Petroleum and oils soaked surfaces can pose other hazards when not properly removed with regularly scheduled and proper cleaning practices. With the addition of our brightfinish we enhance our impervious tiles and reduce their absorbency to levels at the lowest end of the spectrum (0.001% or less). This means nothing is absorbed by an AutoStone workshop or service drive floor tile. AutoStone workshop floor systems are premium floor systems which are designed to resist staining and be easier to clean.

### Limitations

Surface is a non-vitreous (impervious) enhanced porcelain tile. Oil, grease and all contaminants will remain on surface until properly cleaned and removed.

*Not for use in carwash areas where high volume water and/or high pressure water systems are used.*

enviroshop <small>smarter, better workshops</small>	THICKNESS		SMOKE GREY	ALLOY GREY	CARBON BLACK
	METRIC DIMENSIONS	U.S. NOMINAL DIMENSIONS			
<b>12" x 12"*</b> <small>* = U.S. Nominal Dimensions 11 7/8" x 11 7/8" (Actual Size) Dimensions may vary within (+) or (-) .5mm in sizing</small>	<b>10 mm*</b>	<b>7/16"</b>			
	<b>12 mm*</b>	<b>1/2"</b>			

\* thickness tolerance is: (+) or (-) .5mm


## Enviroshop Sizes and Thicknesses in Metric & U.S. Nominal


\*thickness tolerance is (+) or (-) .5mm

Smoke Grey	Alloy Grey	Carbon Black
12" x 12"*	12" x 12"*	12" x 12"*
-10mm (7/16")	-10mm (7/16")	-10mm (7/16")
-12mm (1/2")	-12mm (1/2")	-12mm (1/2")

\* = U.S. Nominal Dimension

12" x 12" (U.S. Nominal Dimension) = 11 7/8" x 11 7/8" (Actual Size)

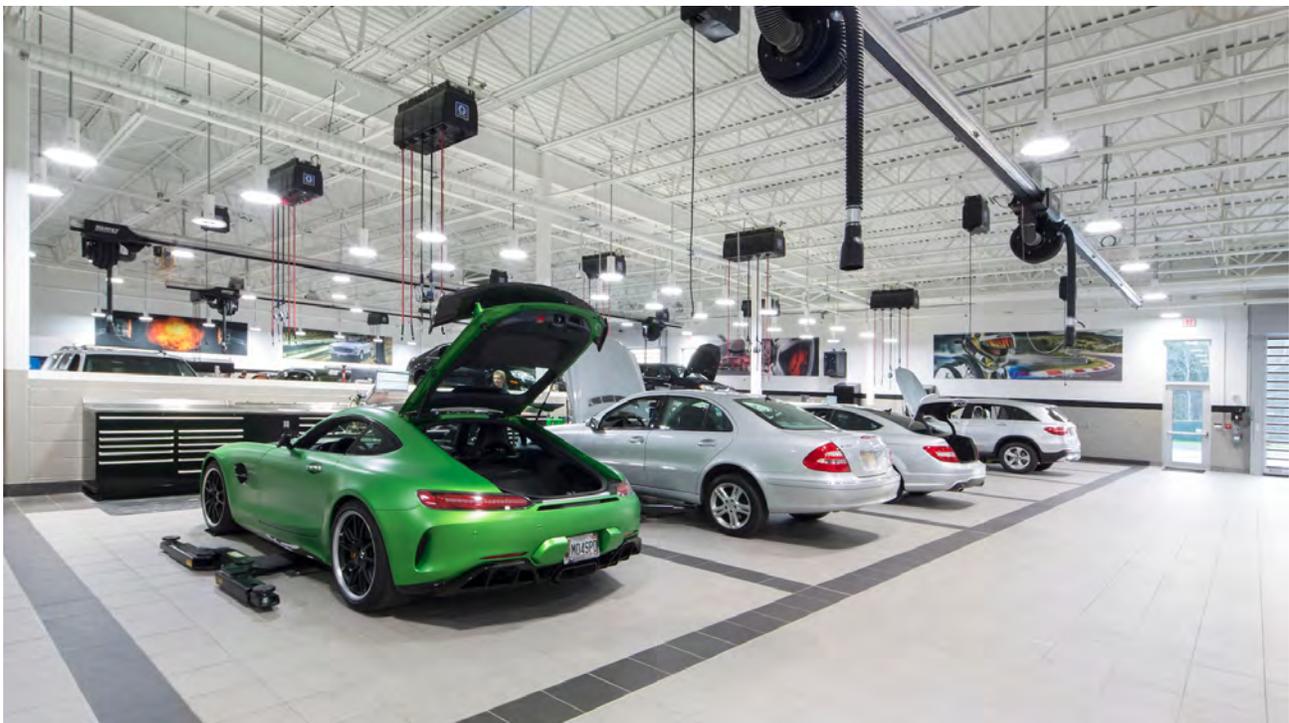



12" x 12"\*

\* = U.S. Nominal Dimension

12" x 12" (U.S. Nominal Dimension) = 11 7/8" x 11 7/8" (Actual Size)



- Stocked USA ■ Alloy Grey
- Stocked USA ■ Smoke Grey
- Stocked USA ■ Carbon Black



- Standard 8-10 ■ Alloy Grey
- Standard 8-10 ■ Smoke Grey
- Standard 8-10 ■ Carbon Black

\* thickness tolerance is: (+) or (-) .5mm

## Material Availability

### ■ STOCKED USA

Product stocked in USA warehouse. 1 week preparation + ground (US) shipping.

### ■ STANDARD 8-10

Standard production product. 8-10 week production + ground (US) shipping.

With multiple floor surfaces and thicknesses AutoStone Floor Systems has the right floor solution for your unique situation.



smarter, better, workshops

## Installation

See AutoStone recommended 09300 specifications for thinset standards on concrete substrate and AutoStone recommended installation standards.

## Recommended Grout Color & Setting Materials by Laticrete

### Alloy Grey

**Grout:** Laticrete Permacolor 89 Smoke Grey

**Thinset:** LHT Plus

Below: actual color varies, example is only representative



### Smoke Grey

**Grout:** Laticrete Permacolor 42 Platinum

**Thinset:** LHT Plus

Below: actual color varies, example is only representative



### Carbon Black

**Grout:** Laticrete Permacolor 45 Raven

**Thinset:** LHT Plus

Below: actual color varies, example is only representative

