




10-Year Laticrete Warranty only when you order through AutoStone Floor Systems

Thinset LHT Plus

A polymer modified large and heavy tile mortar specifically formulated to provide a one-step installation for large format ceramic tile, porcelain tile, marble and stone on floors and walls.

Link to Laticrete Product Page:

<https://laticrete.com/tile-and-stone-installation/adhesives-and-mortars/large-and-heavy-tile-mortar/lht-plus>

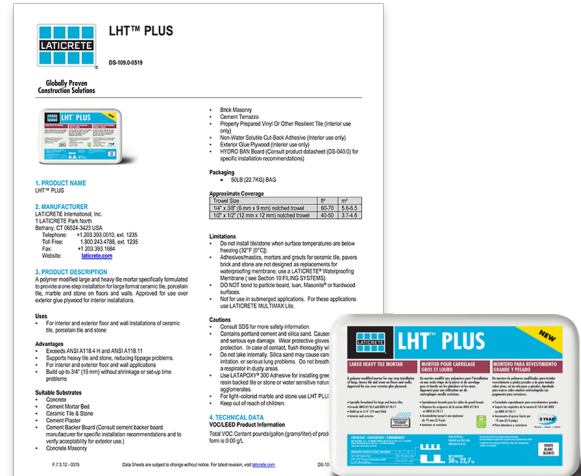


Thinset For Walls 4-XLT

4-XLT is a multi-use, polymer fortified adhesive mortar. 4-XLT offers tremendous utility including non-sag wall installations, large heavy mortar build-up of up to 3/4" (19 mm) and thin-set applications.

Link to Laticrete Product Page:

<https://laticrete.com/tile-and-stone-installation/adhesives-and-mortars/large-and-heavy-tile-mortar/4-xlt>

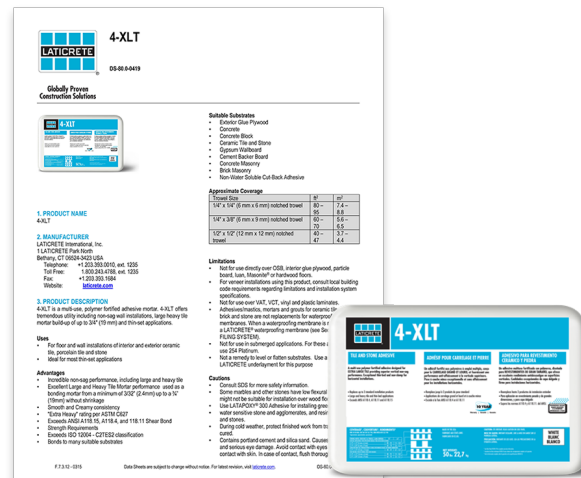


Grout Permacolor

PERMACOLOR® Grout is a high performance grout that provides a grout joint that is dense, hard and will resist cracking.

Link to Laticrete Product Page:

<https://laticrete.com/tile-and-stone-installation/grouts/cementitious-grouts/permacolor-grout>

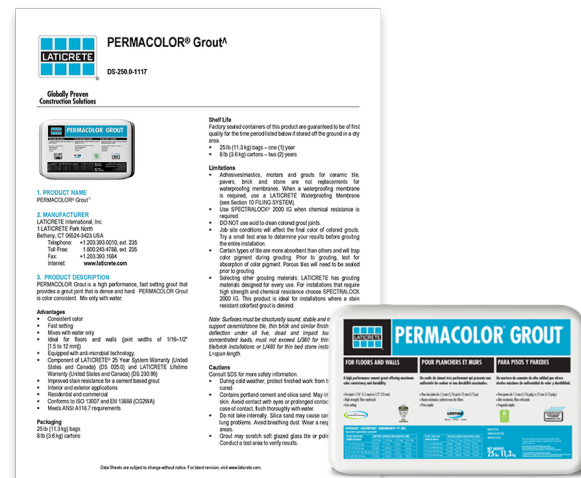



10-Year Laticrete Warranty only when you order through AutoStone Floor Systems

Caulking Premium Acrylic Caulk

Premium Acrylic Caulk is a high performance silicized acrylic latex sealant designed for interior applications for ceramic tile & stone.

Link to Laticrete Product Page:

<https://laticrete.com/tile-and-stone-installation/caulks-and-sealants/acrylic-sealants/premium-acrylic-caulk>

Premium Acrylic Caulk
DS-027-0-0414

Globally Proven Construction Solutions

1. PRODUCT NAME
Premium Acrylic Caulk

2. MANUFACTURER
LATICRETE International, Inc.
LATICRETE Park Town
Belling, CT 06024-0001 USA
Telephone: +1 203 263 0200, ext. 236
Toll Free: 1 800 224 4388, ext. 236
Fax: +1 203 263 1588
Internet: www.laticrete.com

3. PRODUCT DESCRIPTION
Premium Acrylic Caulk is a high performance silicized acrylic latex sealant designed for interior applications for ceramic tile and stone. Premium Acrylic Caulk is ideal for a variety of setting applications in bathrooms, kitchens and floors.

Use

- For sealing around sinks, tubs and showers
- Onset of transitions between flooring and substrates
- Corner joints where walls meet

Advantages

- Remains pliable & rubbery growth
- Available in 100% White & Acrylic
- Contains all LATICRETE® great colors
- Easy to rework and touch
- Adheres well to plumbing fixtures
- Resistant to mold and mildew
- Flexible

Substrate Substrates

- Ceramic Tile
- Marble
- Glass Block
- Porcelain
- Stone*
- Stainless Steel

*Contact and test area inverts if any staining occurs. Do not use if any staining occurs.

Available Colors

- Available in all 60 LATICRETE® great colors in both standard and unstandard versions

Packaging

- Available in 10.5 gal (39.6 L) kates
- Filling tubes in an area suitable patient 12 tubes per carton
- 10 standard sizes: 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 1 7/8", 2", 2 1/8", 2 1/4", 2 1/2", 2 3/4"
- Specialty sizes: 7/8", 1", 1 1/8", 1 1/4", 1 1/2", 1 3/4", 1 7/8", 2", 2 1/8", 2 1/4", 2 1/2", 2 3/4"

Approximate Coverage

- Coverage will vary depending upon joint size and width. Consult LATICRETE Technical Services for exact coverage.
- Approximately 10 tubes (1.32 qt) per 10' x 10' x 1/8" (3.05 mm) joint.

Shelf Life
Factory sealed containers of this product are guaranteed to be of that quality for 15 years if stored at temperatures between 32°F (0°C) and 100°F (38°C).

Limitations

- For interior use only
- Not for use on concrete or permanent wet area applications. Use LATICRETE®
- Sealants are not recommended for waterproofing membranes, shower, tub, and stone applications. For waterproofing membranes, use LATICRETE®
- Not for use on substrates such as limestone and sandstone, but suitable on a small area for any indication of fluid migration or high-moisture.

DS-027-0-0414



Crack Isolation Fracture Ban SC

FRACTURE BAN SC is a thin, load bearing, self-curing liquid rubber polymer that can be easily applied in a single coat to form a flexible seamless anti-fracture membrane.

Link to Laticrete Product Page:

<https://laticrete.com/en/tile-and-stone-installation/anti-fracture/fracture-ban-sc>

FRACTURE BAN™ SC
DS-644-0020

Globally Proven Construction Solutions

1. PRODUCT NAME
FRACTURE BAN™ SC

2. MANUFACTURER
LATICRETE International, Inc.
LATICRETE Park Town
Belling, CT 06024-0001 USA
Telephone: +1 203 263 0200, ext. 1235
Toll Free: 1 800 243 4778, ext. 1235
Fax: +1 203 263 1588
Website: laticrete.com

3. PRODUCT DESCRIPTION
FRACTURE BAN SC is a thin, load bearing, self-curing liquid rubber polymer that can be easily applied in a single coat to form a flexible seamless anti-fracture membrane. FRACTURE BAN SC can be used on interior and exterior, horizontal to vertical applications. FRACTURE BAN SC meets all the requirements and prevents mold/mildew. In-place floor cracks up to 1/8" (3 mm) from transferring through grout, concrete, tile and stone.

Use

- Interior and exterior
- Horizontal, vertical and diagonal applications
- Transitions and balconies over uncoated spaces

Advantages

- Does not require the use of fabric

Substrate Substrates

- Cementitious Masonry
- Exterior Glass Fibrocrete (Interior Only)
- Cement Mortar
- Cement Terrazzo
- Concrete and Brick Masonry
- Ceramic Tile and Stone
- Ceramic Tiles*
- Polished Concrete Underlayment

Packaging
Conventional Gals: 3.5 gal (13.3 L) pails (10 gal (37.9 L) kates)

Shelf Life
Factory sealed containers of this product are guaranteed to be of that quality for 15 years if stored at temperatures 32°F (0°C) and 100°F (38°C).

Limitations

- DO NOT bond to GDS, particle board, vermiculite, perlite, foam, insulation or hardwood surfaces.
- Adhesive, mechanical, mortar and grout for tile, pavers, brick and stone are not recommended. Waterproofing membranes, shower, tub and stone applications are not recommended. For waterproofing membranes, use HYDRO BARRIER™.
- Do not use over dynamic expansion joints, set screws or cracks with vertical differential movement.
- Do not use over cracks > 1/8" (3 mm) in width.
- Do not expose waterproofing membrane to sun or weather for more than 30 days.
- Do not expose to negative hydrostatic pressure.

DS-644-0020



Waterproofing Hydro Barrier

HYDRO BARRIER™ is a thin, load bearing, self curing liquid rubber polymer which can be easily applied to form a flexible, seamless waterproof anti-fracture membrane.

Link to Laticrete Product Page:

<https://laticrete.com/tile-and-stone-installation/waterproofing/hydro-barrier>

HYDRO BARRIER™
DS-105-0-0517

Globally Proven Construction Solutions

1. PRODUCT NAME
HYDRO BARRIER™

2. MANUFACTURER
LATICRETE International, Inc.
LATICRETE Park Town
Belling, CT 06024-0001 USA
Telephone: +1 203 263 0200, ext. 236
Toll Free: 1 800 224 4388, ext. 236
Fax: +1 203 263 1588
Internet: www.laticrete.com

3. PRODUCT DESCRIPTION
HYDRO BARRIER is a thin, load bearing, self-curing liquid rubber polymer which can be easily applied to form a flexible seamless waterproofing membrane. HYDRO BARRIER can be used on interior and exterior, horizontal or vertical surfaces and is approved by APWA for use as a shower pan liner.

Use

- Interior and exterior
- Showering pools, bathtubs and water features
- Shower pans, walls and ceilings
- Horizontal, vertical and diagonal applications
- Transitions and balconies over uncoated spaces
- Overlaid on existing waterproofing
- Overlaid on concrete over uncoated spaces
- Overlaid on masonry
- Overlaid on stone (used in conjunction with a vapor barrier)

Advantages

- Thin, only 0.020-0.025" (0.5-0.6 mm) thick when cured
- Changes color from light blue to dark blue when cured
- Anti-fracture protection of up to 1/8" (3 mm) over shrinkage and other non-structural cracks
- Easy to rework, touch-up and repair
- Resistant to mold and mildew
- Meets all the requirements and prevents mold/mildew. In-place floor cracks up to 1/8" (3 mm) from transferring through grout, concrete, tile and stone.
- Exceeds ANSI A118.10 and A118.12
- Easy to rework, touch-up and repair
- Resistant to mold and mildew
- Meets all the requirements and prevents mold/mildew. In-place floor cracks up to 1/8" (3 mm) from transferring through grout, concrete, tile and stone.
- Exceeds ANSI A118.10 and A118.12
- Approved for use with all Laticrete products.

Substrate Substrates

- Ceramic & Brick Masonry
- Cement Mortar
- Cement Terrazzo
- Concrete and Brick Masonry
- Ceramic Tiles*
- Polished Concrete Underlayment
- Polished Concrete
- Polished Concrete Underlayment

Packaging
Full Size: 5 gal (18.9 L) pails (10 gal (37.9 L) kates)

Shelf Life
Factory sealed containers of this product are guaranteed to be of that quality for 15 years if stored at temperatures 32°F (0°C) and 100°F (38°C).

Limitations

- DO NOT bond to GDS, particle board, vermiculite, perlite, foam, insulation or hardwood surfaces.
- Adhesive, mechanical, mortar and grout for tile, pavers, brick and stone are not recommended. Waterproofing membranes, shower, tub and stone applications are not recommended. For waterproofing membranes, use HYDRO BARRIER™.
- Do not use over dynamic expansion joints, set screws or cracks with vertical differential movement.
- Do not use over cracks > 1/8" (3 mm) in width.
- Do not expose waterproofing membrane to sun or weather for more than 30 days.
- Do not expose to negative hydrostatic pressure.

DS-105-0-0517



