


# Audi

## Technical Data Sheet

*2023 Edition*

Audi Architectural Terminal Program  
[AutoStoneUSA.com/Audi](http://AutoStoneUSA.com/Audi)

---



**MADE IN AMERICA**





## F-4 Showroom & Customer Contact Areas

**Series:** Silverstone  
**Color:** Taupe  
**Finish:** Honed | Natural  
**Size:** 32" x 32" Made in USA



**Thickness:**

**10 mm\*** \* 32" x 32" format

Made thicker because cars drive on these floors and larger format (32"x32" size) tiles. AutoStoneUSA 10 mm thick tiles resist cracks and breaking under these heavy stress & weight loads.



**SLIGHT VARIATION**  
 Clearly distinguishable differences in texture and/or pattern with similar colors.

## Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	<b>CERTIFIED PORCELAIN TILE</b> <small>0.5% or less water absorption</small>	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	Complies with ANSI A326.3 4.1.1 Interior Dry and 4.1.2 Interior Wet	≥0.42 WET	≥0.42 WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

\* Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.


# Q2KD

## Q2KD QUARRY TO KILN DISTRIBUTION MODEL




**1** **LOCALLY SOURCED & LOCALLY QUARRIED**

- ✓ Elimination of trans-ocean shipping
- ✓ US jobs, shorter supply chain

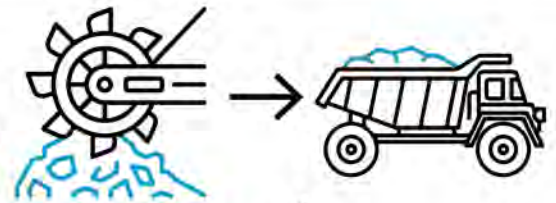


**2** **DOMESTICALLY PRODUCED & LOCALLY WAREHOUSED**

- ✓ Less shipping
- ✓ Reduced carbon footprint

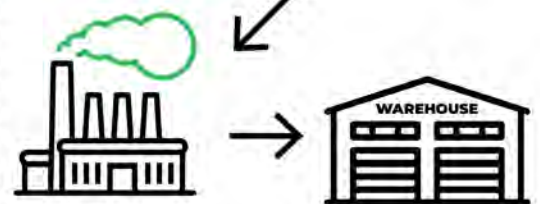

**3** **CONSOLIDATED SHIPPING DIRECT TO YOUR DEALERSHIP**

- ✓ Eliminates distribution shipping
- ✓ Reduces use of fossil fuel

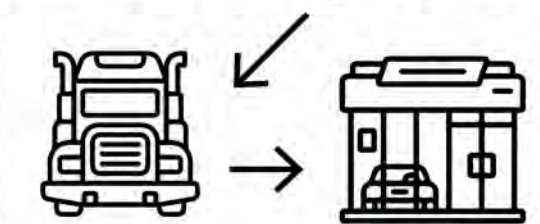

**4** **DOMESTICALLY PRODUCED SMARTER & EFFICIENT DISTRIBUTION**

- ✓ Better for the environment
- ✓ Saves you money



## Build with AutoStone.

AutoStone is the best choice for your Audi Architectural Terminal project. We are approved for: showroom, service drive and shop floor materials. Select AutoStone for your Audi brand compliant dealership tile finish.

One provider for your entire facility. Go with the experts, select AutoStone.  
All materials are built and manufactured to build better Audi dealerships!

## Warranty

See AutoStoneUSA materials warranty.

*AutoStone does not warrant the labor services of third party contractors.  
See warranties for specifics.*

## Installation

See AutoStone recommended 09300 specifications for thinset standards on concrete substrate and AutoStone recommended installation standards.

## Contact Information

**Email:** [audi@autostoneusa.com](mailto:audi@autostoneusa.com)

**Audi Line:** 214-393-4875

## Request For Quote

**Website:** [www.autostoneusa.com/faq-audi](http://www.autostoneusa.com/faq-audi)

## Kia Brand Page

**Website:** [www.autostoneusa.com/audi](http://www.autostoneusa.com/audi)

## Senior Management Contact Information

### Barry Wells

[barry@autostoneusa.com](mailto:barry@autostoneusa.com)

**Mobile:** 214-830-1206

**Direct:** 214-393-4862

