

autostone
floor systems




Hyundai
GDSI2.0

Technical Data Sheet

2023 Program Submittal




AutoStoneUSA.com/Hyundai



MADE IN AMERICA

AutoStoneUSA.com

© 2023 AutoStone Floor Systems, All Rights Reserved.

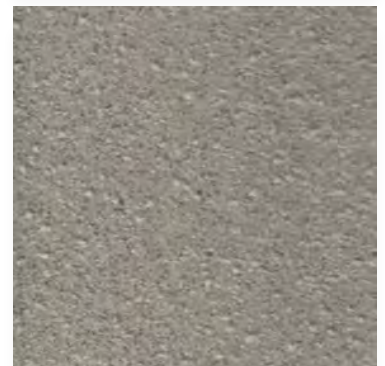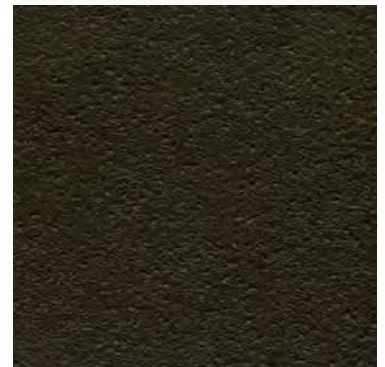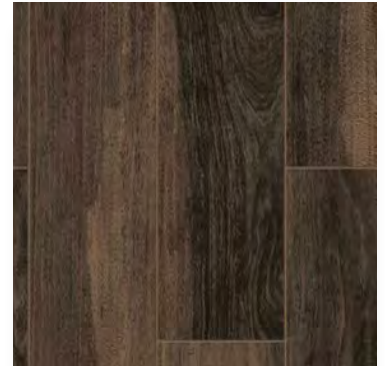





CT-1 Showroom

Series: American Made!
Color: American Harvest
Finish: Natural | Honed
Code: AS1103643.1225.NH
Size: 12" x 24" (U.S. Nominal Dimensions)

Thickness: 

25% THICKER

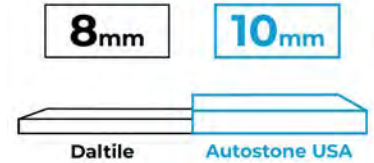

CTB-1 Base

Series: American Made!
Color: American Harvest
Finish: Natural | Honed
Code: AS1103645.0312NH
Size: 03" x 12" (U.S. Nominal Dimensions)




AutoStone CT-1, CT-2, CT-6 are all the same thickness (10mm)



CT-2 Lead Car Zone Display Pad

Series: American Made!
Color: American Harvest
Finish: Natural | Honed
Code: AS1103640.2424NH
Size: 24" x 24" (U.S. Nominal Dimensions)

Thickness: 




Daltille materials mix different thickness of materials.



CT-6 Customer Lounge Tile

Series: American Wood
Color: Walnut
Finish: Natural | Honed
Code: AS1103646.0636NH
Size: 06" x 36" (U.S. Nominal Dimensions)

Thickness: 

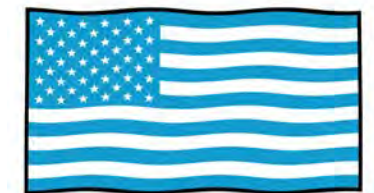


AutoStone Hyundai tiles (CT-1, CT-2, CT-6, CT-7, & CT-8) are USA manufactured



CTB-2 Base

Series: American Made!
Color: American Wood
Finish: Natural | Honed
Code: AS1103646.0636NH
Size: 06" x 36" (U.S. Nominal Dimensions)

Thickness: 

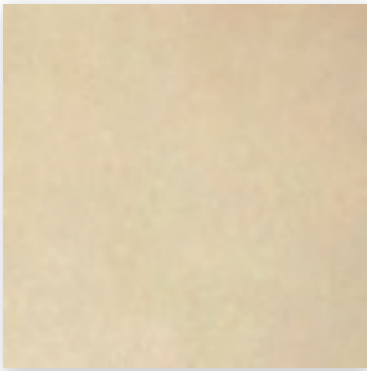

CT-1 & CT-2 Showroom

Series: American Made!
Color: American Harvest
Finish: Natural | Honed
Code: AS1103643.1225.NH and AS1103640.2424.NH
Size: 12" x 24" x **10 mm*** and 24" x 24" x **10 mm** (thick) U.S. Nominal Dimensions
rectified edge profile



ANSI A326.3 Declared Use:

- 4.1.1 Interior, Dry (ID)
- 4.1.2 Interior Wet (IW)

technical specifications

| | SPECS | TEST METHOD | INDUSTRY STANDARD | AUTOSTONEUSA |
|--|----------------------|-------------|--|-------------------------------------|
| | WATER ABSORPTION | ASTM C373 | ≤0.5% | ≤0.4% |
| | CHEMICAL RESISTANCE | ASTM C650 | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects. | NOT AFFECTED |
| | D.C.O.F. AcuTest® | ANSI A326.3 | ≥0.42% WET | ≥0.42% WET |
| | STAIN RESISTANCE | ASTM C1378 | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED |
| | BREAKING STRENGTH | ASTM C648 | ≥250 lb/ft2 | 8mm ≥300 lb/ft2 10mm ≥400 lb/ft2 |
| | RESISTANCE TO FREEZE | ASTM C1026 | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects. | RESISTANT |
| | WARPAGE EDGE | ASTM C485 | Warpage ± 0.4% or ± 0.05 in | ≥± 0.4% |
| | WARPAGE DIAGONAL | ASTM C485 | Warpage ± 0.4% or ± 0.07 in | ≥± 0.4% |
| | WARPAGE EDGE | ASTM C485 | Warpage ± 0.5% or ± 0.07 in | ≥± 0.5% |
| | WARPAGE DIAGONAL | ASTM C485 | Warpage ± 0.5% or ± 0.07 in | ≥± 0.5% |
| | WEDGING | ASTM C502 | ± 0.25% or ± 0.03 in | ≥± 0.25% |
| | THICKNESS | ASTM C499 | Range: ± 0.04 in | ≤0.04 in |

V2
SLIGHT VARIATION
 Clearly distinguishable differences in texture and/or pattern with similar colors.















CT-6 Customer Lounge



Series: American Wood
Color: Walnut
Finish: Natural | Honed
Code: AS1103646.0636NH
Size: 06" x 36" x 10mm* (thick) U.S. Nominal Dimensions
 calibrated edge profile | pressed tile

ANSI A326.3 Declared Use:
 4.1.1 Interior, Dry (ID)
 4.1.2 Interior Wet (IW)

TECHNICAL SPECIFICATIONS

| | SPECS | TEST METHOD | INDUSTRY STANDARD | VALUES |
|--|----------------------|-------------|--|---|
|  | WATER ABSORPTION | ASTM C373 | ≤0.5% | ≤0.4% |
|  | CHEMICAL RESISTANCE | ASTM C650 | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects. | NOT AFFECTED |
|  | D.C.O.F. AcuTest® | ANSI A326.3 | ≥0.42% WET | ≥0.42% WET |
|  | STAIN RESISTANCE | ASTM C1378 | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED |
|  | BREAKING STRENGTH | ASTM C648 | ≥250 lb/ft ² | 8mm ≥300 lb/ft ² 10mm ≥400 lb/ft ² |
|  | RESISTANCE TO FREEZE | ASTM C1026 | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects. | RESISTANT |
|  | WARPAGE EDGE ASTM | ASTM C485 | Warpage ± 0.4% or ± 0.05 in | ± 0.4% |
|  | WARPAGE DIAGONAL | ASTM C485 | Warpage ± 0.4% or ± 0.07 in | ± 0.4% |
|  | WARPAGE EDGE ASTM | ASTM C485 | Warpage ± 0.5% or ± 0.07 in | ± 0.5% |
|  | WARPAGE DIAGONAL | ASTM C485 | Warpage ± 0.5% or ± 0.07 in | ± 0.5% |
|  | WEDGING | ASTM C502 | ± 0.25% or ± 0.03 in | ≥ ± 0.25% |
|  | THICKNESS | ASTM C499 | Range: ± 0.04 in | ≤0.04 in |

* Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CT-7

Alloy Grey

Size: 12" x 12"

Finish: BrightFinish

Surface: Textured

Use: IW+



CT-8

Carbon Black

Size: 12" x 12"

Finish: BrightFinish

Surface: Textured

Use: IW+

Product Use Category 4.1.3. Interior, Wet Plus (IW+)

4.1.3 Interior, Wet Plus (IW+) Evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop is medium traction surface. For interior applications, with good drainage. Floors walked on when wet if level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.

DCOF Meets and exceeds .50 DCOF rating as required for ANSI A326 4.1.3 (IW+)

| SURFACES DIMENSION AND QUALITIES | ANSI 326.3:2017 4.1.2 Interior Wet Plus >.50 DCOF STANDARDS | RESULT "AutoStone Results" |
|---|---|-----------------------------------|
| Sides W 300X300 mm Thickness 9.0 mm | UNI EN ISO 10545-2 | +/- 0,1% +/- 1,5% |
| Surface qualities: percentage of acceptable tiles per lot | UNI EN ISO 10545-2 | > 95% |
| Straightness of sides | UNI EN ISO 10545-2 | +/- 0,0% |
| Rectangularity | UNI EN ISO 10545-2 | +/- 0,1% |
| Surface flatness: centre curvature | UNI EN ISO 10545-2 | +/- 0,2% |
| Surface flatness: edge curvature | UNI EN ISO 10545-2 | +/- 0,1% |
| Surface flatness: warpage | UNI EN ISO 10545-2 | +/- 0,2% |
| PHYSICAL PROPERTIES | | |
| Water mass absorbed in % | UNI EN ISO 10545-3 | 0,03 |
| Average breaking load (N) | UNI EN ISO 10545-4 | 2500 |
| Average <u>moduls</u> of rupture (N/mm2) | UNI EN ISO 10545-4 | 51 |
| Average breaking strength (N) | UNI EN ISO 10545-4 | 2458 |
| Abrasion volume (mm3) | UNI EN ISO 10545-6 | 152 |
| Thermal expansion coefficient | UNI EN ISO 10545-8 | 6.2 MK ¹ |
| Thermal shock resistance | UNI EN ISO 10545-9 | resistant |
| Frost resistance | UNI EN ISO 10545-12 | resistant |
| Resistance of the colors in the light | DIN 51094 | resistant |
| CHEMICAL PROPERTIES | | |
| Resistance to chemical products | UNI EN ISO 10545-13 | resistant |
| Stain resistance | UNI EN ISO 10545-14 | Class 5 |

Please note that no tile is slip proof. There are many things that you should address when you select products for your service drive and vehicle drop-off areas, or any and all areas of your dealership. STF (slip, trip, and fall) risk occur anywhere and everywhere. There are many things that impact your dealership which can either help or hinder your ability to manage this risk. These are things that include: facility design, protection from the weather, proper drainage, dealership cleaning practices, dealership management practices, access doors, floor slope and the number of customers you service daily. These are just a few of the many things that must be considered and factored in when you select the product you use for your service lane and shop areas. Your architect is your primary resource for assuring that the floors specified for all areas of your dealership are the correct product and application. They have access to most of the necessary items to provide you the best or better tool to help manage the risk associated with slip and fall accidents. There are no guarantees that eliminate this risk. There are only better practices and products that help you better manage these risks.



CT-7

Alloy Grey
 Size: 08" x 08"
 Finish: BrightFinish
 Surface: High Traction
 Use: EW & O/G



CT-8

Carbon Black
 Size: 08" x 08"
 Finish: BrightFinish
 Surface: High Traction
 Use: EW & O/G

Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard. **DCOF** - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

| SURFACES DIMENSION AND QUALITIES | ANSI A326.3 2022 STANDARDS | > .55 DCOF RESULT "AutoStone Results" |
|---|----------------------------|---------------------------------------|
| Sides W 20X20 cm | UNI EN ISO 10545-2 | +/- 0,1% +/- 1,5% |
| Surface qualities: percentage of acceptable tiles per lot | UNI EN ISO 10545-2 | > 95% |
| Straightness of sides | UNI EN ISO 10545-2 | +/- 0,0% |
| Rectangularity | UNI EN ISO 10545-2 | +/- 0,1% |
| Surface flatness: centre curvature | UNI EN ISO 10545-2 | +/- 0,2% |
| Surface flatness: edge curvature | UNI EN ISO 10545-2 | +/- 0,1% |
| Surface flatness: warpage | UNI EN ISO 10545-2 | +/- 0,2% |
| PHYSICAL PROPERTIES | | |
| Water mass absorbed in % | UNI EN ISO 10545-3 | 0,03 |
| Average breaking load (N) | UNI EN ISO 10545-4 | 2500 |
| Average <u>moduls</u> of rupture (N/mm2) | UNI EN ISO 10545-4 | 51 |
| Average breaking strength (N) | UNI EN ISO 10545-4 | 2458 |
| Abrasion volume (mm3) | UNI EN ISO 10545-6 | 152 |
| Thermal expansion coefficient | UNI EN ISO 10545-8 | 6.2 MK ¹ |
| Thermal shock resistance | UNI EN ISO 10545-9 | resistant |
| Frost resistance | UNI EN ISO 10545-12 | resistant |
| Resistance of the colors in the light | DIN 51094 | resistant |
| CHEMICAL PROPERTIES | | |
| Resistance to chemical products | UNI EN ISO 10545-13 | resistant |
| Stain resistance | UNI EN ISO 10545-14 | Class 5 |

Note: made in European Union.

Please note that no tile is slip proof. There are many things that you should address when you select products for your service drive and vehicle drop-off areas, or any and all areas of your dealership. STF (slip, trip, and fall) risk occur anywhere and everywhere. There are many things that impact your dealership which can either help or hinder your ability to manage this risk. These are things that include: facility design, protection from the weather, proper drainage, dealership cleaning practices, dealership management practices, access doors, floor slope and the number of customers you service daily. These are just a few of the many things that must be considered and factored in when you select the product you use for your service lane and shop areas. Your architect is your primary resource for assuring that the floors specified for all areas of your dealership are the correct product and application. They have access to most of the necessary items to provide you the best or better tool to help manage the risk associated with slip and fall accidents. There are no guarantees that eliminate this risk. There are only better practices and products that help you better manage these risks.

enviroshop

smarter, better, workshops

brightfinish

ultra-cleanable
technology



Brightfinish is a permanent sealant applied during manufacturing process which seals tile surface to resist staining. Additionally, brightfinish aids cleaning practices so floors can be kept in a "like-new" condition for the life of the dealership with regularly scheduled and proper cleaning practices.

driveseries!

advanced surface technology

brightfinish

ultra-cleanable
technology



Brightfinish is a permanent sealant applied during manufacturing process which seals tile surface to resist staining. Additionally, brightfinish aids cleaning practices so floors can be kept in a "like-new" condition for the life of the dealership with regularly scheduled and proper cleaning practices.

Product Use Category 4.1.3. Interior, Wet Plus (IW+)

4.1.3 Interior, Wet Plus (IW+) Evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop is medium traction surface. For interior applications, with good drainage. Floors walked on when wet if level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.

DCOF Meets and exceeds .50 DCOF rating as required for ANSI A326 4.1.3 (IW+)

Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.

DCOF

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

Recommendations

Surface is a non-vitreous (impervious) enhanced porcelain tile. Oil, grease and all contaminants will remain on surface until properly cleaned. Floors should be cleaned with frequent maintenance to keep clean and free of contamination and debris when dealership is operating. To best manage STF (slip, trip, and fall) risk, spills and chemicals should be spot cleaned immediately and not left on surface. Floor cleaning should include use of de-greasing chemical, floor scrubber sweeper machine with wet vacuum to suck-up dirty water and debris as part of cleaning process.

For specific use applications, please consult with your architect or builder, or contact AutoStone USA with questions.