



# eShop2USA 8x8 Guide Book

*2023.10 Edition*

---

Contains tile specifications including thickness, grout material matching, and more.

Product Use Category 4.1.3 Interior, Wet Plus (IW+)



**MADE IN AMERICA**


**AutoStoneUSA.com**

© 2023 AutoStone Floor Systems, All Rights Reserved.



# Q2KD

## QUARRY TO KILN DISTRIBUTION MODEL

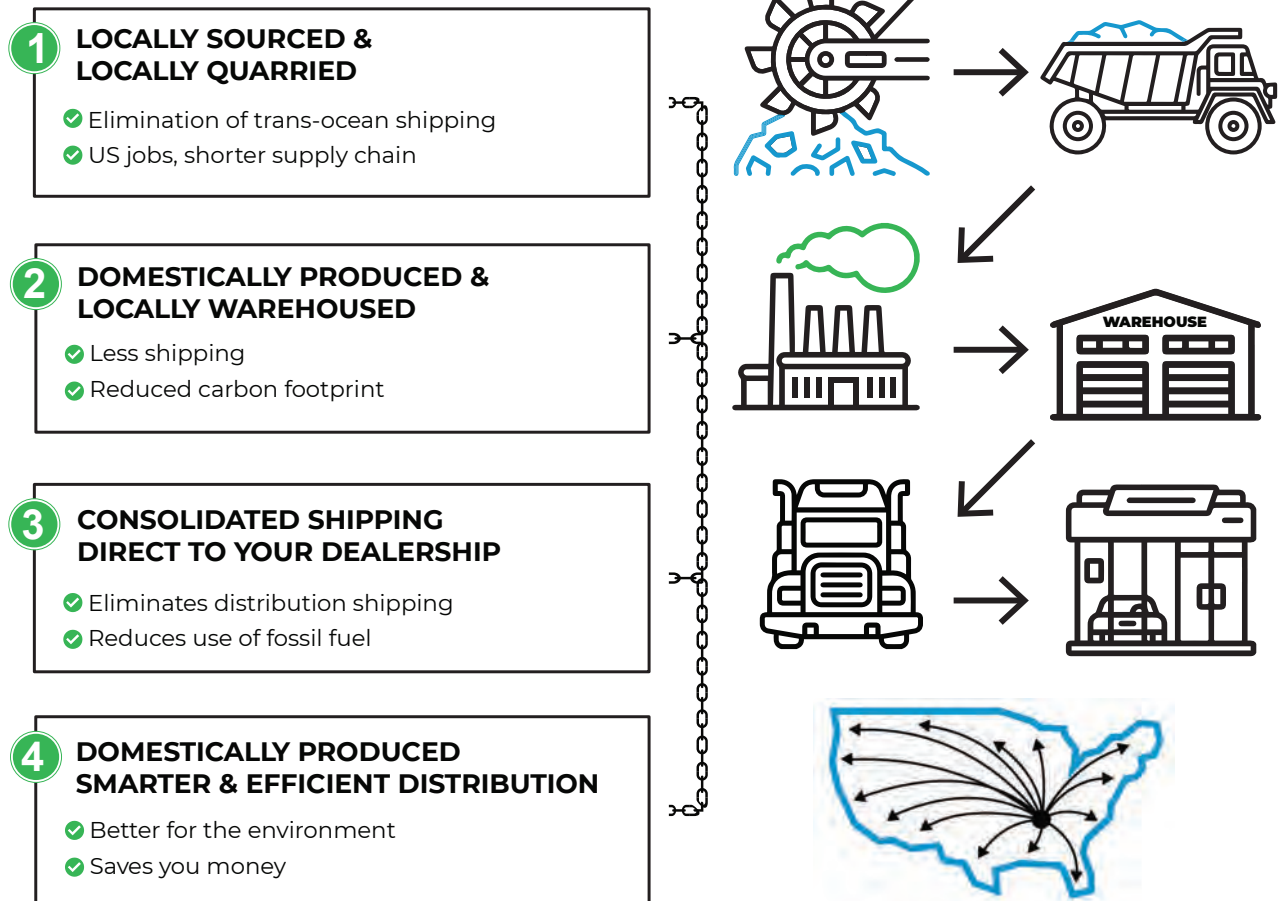



## Alloy Grey

**Series:** eShop2USA

**Color:** Alloy Grey

**Finish:** SLR Shop Textured

**Size:** (U.S. Nominal Dimensions)

8" x 8"

**eshop2usa**  
better technology. better results



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor 89 Smoke Grey

**Thinset:** LHT Plus



## Genesis-Carbon Black

**Series:** eShop2USA

**Color:** Genesis-Carbon Black

**Finish:** SLR Shop Textured

**Size:** (U.S. Nominal Dimensions)

8" x 8"

**eshop2usa**  
better technology. better results



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 45 Raven

**Thinset:** LHT Plus


**eshop2usa**  
better technology, better results

## Material Availability

### MADE IN USA

Product stocked in USA warehouse

1 week preparation + ground shipping




Easy to work with,  
helpful, & supportive



The MOST  
affordable tile choice!



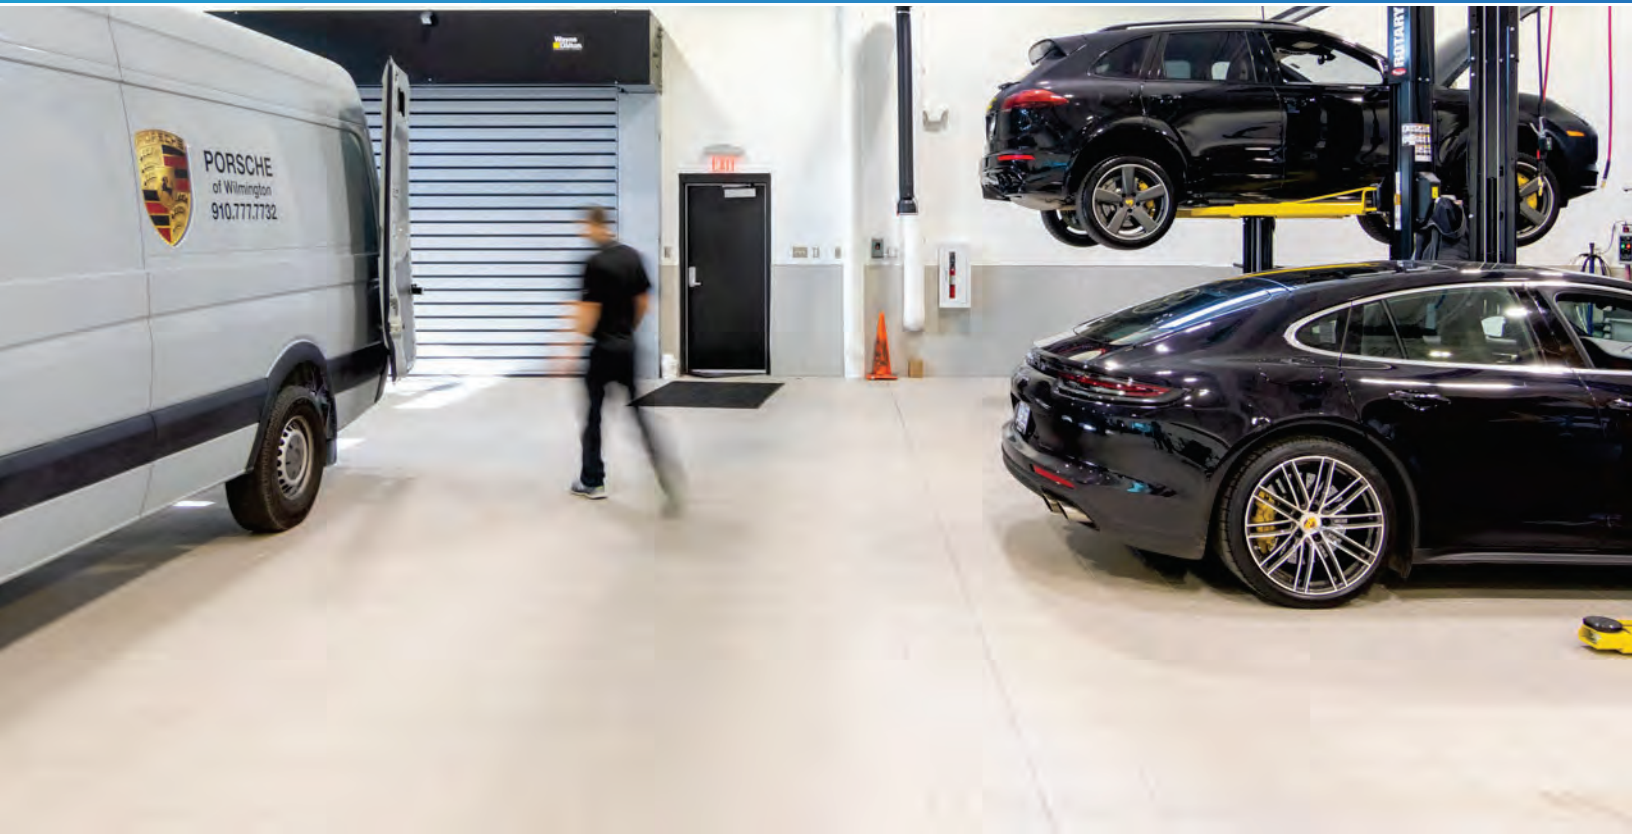

### Brightfinish Ultra-Cleanable Technology

Brightfinish is a permanent sealant baked-in during kiln-firing process. The Brightfinish permanent sealant aids dealership with their cleaning practices by sealing surface micropores which trap and hold-on to rubber transfer, grease, oil or other contaminants.

### Enhanced Impervious Surface Technology


An impervious tile is the highest performance standard in the porcelain tile industry. The definition of an impervious tile is a surface that absorbs moisture between 0.5% to 0.001%. At AutoStone, we think that 0.5% is too much absorbency, and in an automotive dealership will cause tiles to absorb oil, grease, petroleum, gasoline and other contaminants. When this happens, your tile surface will darken over use and this leads to potential hazards such as STF (slip, trip and fall) events. Petroleum and oils soaked surfaces can pose other hazards when not properly removed with regularly scheduled and proper cleaning practices. With the addition of our brightfinish we enhance our impervious tiles and reduce their absorbency to levels at the lowest end of the spectrum (0.001% or less). This means nothing is absorbed by an AutoStone workshop or service drive floor tile. AutoStone workshop floor systems are premium floor systems which are designed to resist staining and be easier to clean.

### Limitations

Surface is a non-vitreous (impervious) enhanced porcelain tile. Oil, grease and all contaminants will remain on surface until properly cleaned and removed.

*Not for use in other in IW+ EW or O/G Product Use Applications. These include environments such as carwash areas where high volume water and/or high pressure water systems are used.*

**eshop2usa**  
better technology, better results

enter technology, better results		THICKNESS		ALLOY GREY	CARBON BLACK
		METRIC DIMENSIONS	U.S. NOMINAL DIMENSIONS		
08" x 08"*  * = NOMINAL SIZE  <small>Dimensions may vary within (+) or (-) 2mm in sizing</small>		.394"			
	* thickness tolerance is: (+) or (-) .5mm				






**08" x 08"**\*

\* = U.S. Nominal Dimension  
08" x 08" (U.S. Nominal Dimension)

## Material Availability

### ■ MADE in USA

Manufactured and inventoried in USA warehouse. 1 week preparation + ground (US) shipping is typical supply time-frame.



**MADE IN THE U.S.A.**

**eshop2usa**  
better technology, better results

## Installation

See AutoStone recommended 09300 specifications for thinset standards on concrete substrate and AutoStone recommended installation standards.

## Recommended Grout Color & Setting Materials by Laticrete

### Alloy Grey

**Grout:** Laticrete Permacolor 89 Smoke Grey

**Thinset:** LHT Plus

Below: actual color varies, example is only representative



### Smoke Grey

**Grout:** Laticrete Permacolor 42 Platinum

**Thinset:** LHT Plus

Below: actual color varies, example is only representative



### Carbon Black

**Grout:** Laticrete Permacolor 45 Raven

**Thinset:** LHT Plus

Below: actual color varies, example is only representative







Brightfinish is a permanent sealant applied during manufacturing process which seals tile surface to resist staining. Additionally, brightfinish aids cleaning practices so floors can be kept in a "like-new" condition for the life of the dealership with regularly scheduled and proper cleaning practices.

## Product Use Category 4.1.3. Interior, Wet Plus (IW+)

**4.1.3 Interior, Wet Plus (IW+)** Evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop is medium traction surface. For interior applications, with good drainage. Floors walked on when wet if level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.

**DCOF** Meets and exceeds .50 DCOF rating as required for ANSI A326 4.1.3 (IW+)



Brightfinish is a permanent sealant applied during manufacturing process which seals tile surface to resist staining. Additionally, brightfinish aids cleaning practices so floors can be kept in a "like-new" condition for the life of the dealership with regularly scheduled and proper cleaning practices.

## Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.

## DCOF

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

## Recommendations

Surface is a non-vitreous (impervious) enhanced porcelain tile. Oil, grease and all contaminants will remain on surface until properly cleaned. Floors should be cleaned with frequent maintenance to keep clean and free of contamination and debris when dealership is operating. To best manage STF (slip, trip, and fall) risk, spills and chemicals should be spot cleaned immediately and not left on surface. Floor cleaning should include use of de-greasing chemical, floor scrubber sweeper machine with wet vacuum to suck-up dirty water and debris as part of cleaning process.

For specific use applications, please consult with your architect or builder, or contact AutoStone USA with questions.

## Warranty

See AutoStoneUSA materials warranty.

## Build with AutoStone

Our program supports automotive dealers with the highest quality, most affordable and comprehensive floor tile system for your dealership project. Affordable, high-quality, and easy to do business with are what you will experience with AutoStone. Call us today to support your project.

## Installation

See AutoStone recommended 09300 specifications for thinset standards on concrete substrate and AutoStone recommended installation standards. **See AutoStone for IMPORTANT installation recommendations.**

## AutoStoneUSA Support

AutoStone has a team that supports your Audi project. If your call is not answered immediately, you will receive a return call no later than one business day. All emails are monitored and will be responded to quickly. We are here to support your project!

## Request For Quote

**Website:** <https://autostoneusa.com/eshop2USA>

## Contact Information

**Barry Wells**

[barry@autostoneusa.com](mailto:barry@autostoneusa.com)

**Mobile:** 214-830-1206

**Direct:** 214-393-4862

autostone

eshop2usa  
better technology, better results