

autostone
floor systems



Clean.Tech.USA

Subaru

Tile Technical Specifications

2024.04.01 Edition

Subaru Brand Compliant Program
AutoStoneUSA.com/Subaru



MADE IN AMERICA



SUPPLY CHAIN STRONG

AutoStoneUSA.com

© 2024 AutoStone Floor Systems, All Rights Reserved.



Subaru Tile Technical Specifications

CT-1 - Showroom Floor Tile



CT-1

Showroom & Customer Contact Areas

Series: Clean.Tech.USA

Color: Charcoal

Finish: Honed | Natural

Size: 24" x 24" (U.S. Nominal Dimensions)

ANSI A326.3:

Interior Dry (ID) & Interior Wet (IW)

> .42 DCOF Dry and > .42 DCOF Wet



**USA
MANUFACTURED**

brightfinish
ultra-cleanable technology

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	CERTIFIED PORCELAIN TILE <small>0.5% or less water absorption</small>	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CWT-2 Deep Grey - Charcoal

Series: Premier
Color: Deep Grey Charcoal
Finish: Polished
Size: 24" x 24" (U.S. Nominal Dimensions)


















CWT-2 ALT - Grey


Series: Premier
Color: Grey
Finish: Polished
Finish: Honed | Natural
Size: 24" x 24" (U.S. Nominal Dimensions)

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	CERTIFIED PORCELAIN TILE <small>0.5% or less water absorption</small>	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CWT-3 ALT Simply White













Series: WallTiles!
Color: Simply White
Finish: Satin
Size: 12" x 24" (U.S. Nominal Dimensions)



CWT-4 ALT Stormy Grey

Series: WallTiles!
Color: Stormy Grey
Finish: Glossy
Size: 12" x 24" (U.S. Nominal Dimensions)

TECHNICAL SPECIFICATIONS

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CWT-5 ALT Subway Simply White

Series: WallTiles! - Subway













Color: Bright White

Finish: Glossy

Size: 03" x 06" (U.S. Nominal Dimensions)



TECHNICAL SPECIFICATIONS

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft ²	8mm ≥300 lb/ft ² 10mm ≥400 lb/ft ²
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CWT-6 ALT Granita Grey













Series: WallTiles!
Color: Granita Grey
Finish: Satin
Size: 08" x 08" (U.S. Nominal Dimensions)



CWT-7 ALT Anthracite Grey

Series: WallTiles!
Color: Anthracite Grey
Finish: Satin
Size: 08" x 08" (U.S. Nominal Dimensions)

TECHNICAL SPECIFICATIONS

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft ²	8mm ≥300 lb/ft ² 10mm ≥400 lb/ft ²
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



CT-6 Smoke Grey

Series: DriveSeries08USA
Color: Smoke Grey
Finish: Super.Grip3L.Brightfinish
Size: 8" X 8" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)
4.1.4 Exterior Wet (EW)
4.1.5 Oils/Greases (O/G).



CT-6 ALT Alloy Grey

Series: DriveSeries08USA
Color: Alloy Grey
Finish: Super.Grip3L.Brightfinish
Size: 8" X 8" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)
4.1.4 Exterior Wet (EW)
4.1.5 Oils/Greases (O/G).



CT-7 Carbon-Genesis Black

Series: DriveSeries08USA
Color: Carbon/Genesis Black
Finish: Super.Grip3L.Brightfinish
Size: 8" X 8" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)
4.1.4 Exterior Wet (EW)
4.1.5 Oils/Greases (O/G).



Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to

determine dealership practices. **Review ANSI A326.3 2021 standard.**

Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet (EW).





CT-6 ALT Smoke Grey

Series: eShop08USA

Color: Smoke Grey

Finish: Super.Grip.Brightfinish

Size: 8" X 8" (U.S. Nominal Dimensions)

Surface Traction Conforms to:

- ANSI A326.3 Use Category:
- 4.1.3 Interior Wet Plus (IW+)
- 4.1.4 Exterior Wet (EW)
- 4.1.5 Oils/Greaseses (O/G).



CT-6 ALT Alloy Grey

Series: eShop08USA

Color: Alloy Grey

Finish: Super.Grip.Brightfinish

Size: 8" X 8" (U.S. Nominal Dimensions)

Surface Traction Conforms to:

- ANSI A326.3 Use Category:
- 4.1.3 Interior Wet Plus (IW+)
- 4.1.4 Exterior Wet (EW)
- 4.1.5 Oils/Greaseses (O/G).



CT-7 ALT Carbon-Genesis Black

Series: eShop08USA

Color: Carbon/Genesis Black

Finish: Super.Grip.Brightfinish

Size: 8" X 8" (U.S. Nominal Dimensions)

Surface Traction Conforms to:

- ANSI A326.3 Use Category:
- 4.1.3 Interior Wet Plus (IW+)
- 4.1.4 Exterior Wet (EW)
- 4.1.5 Oils/Greaseses (O/G).



Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to

determine dealership practices. **Review ANSI A326.3 2021 standard.**

Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet (EW).





CT-6 Smoke Grey

Series: Enviroshop12USA
Color: Smoke Grey
Finish: Traction.Brightfinish
Size: 12" x 12" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)



CT-6 ALT Alloy Grey

Series: Enviroshop12USA
Color: Alloy Grey
Finish: Traction.Brightfinish
Size: 12" x 12" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)



CT-7 Carbon Black

Series: Enviroshop12USA
Color: Carbon Black
Finish: Traction.Brightfinish
Size: 12" x 12" (U.S. Nominal Dimensions)
Surface Traction Conforms to:
ANSI A326.3 Use Category:
4.1.3 Interior Wet Plus (IW+)



Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments
4.1.3 (Interior Wet Plus) - Covered exterior areas, where such floors may be walked upon when wet if clean, maintained and free of standing water or other contaminants.

Consult with your architect to determine dealership practices.

Review ANSI A326.3 2021 standard.

Declared Product Use & DCOF Requirement

Meets and exceeds .50 DCOF rating as required for ANSI A326.3 4.1.3 Interior Wet Plus (IW+).





CT-6 ALT Alloy Grey

Series: DriveSeries12USA

Color: Alloy Grey

Finish: Traction3L.Brightfinish

Size: 12" x 12" (U.S. Nominal Dimensions)

Surface Traction Conforms to:

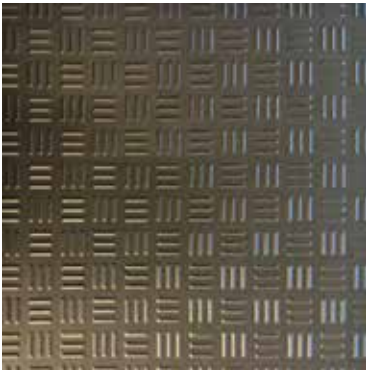
ANSI A326.3 Use Category:

4.1.3 Interior Wet Plus (IW+)

4.1.4 Exterior Wet (EW)

4.1.5 Oils/Greases (O/G).

Below: actual color varies, example is only representative



CT-7 ALT Carbon Black

Series: DriveSeries12USA

Color: Carbon Black

Finish: Traction3L.Brightfinish

Size: 12" x 12" (U.S. Nominal Dimensions)

Surface Traction Conforms to:

ANSI A326.3 Use Category:

4.1.3 Interior Wet Plus (IW+)

4.1.4 Exterior Wet (EW)

4.1.5 Oils/Greases (O/G).



Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments

4.1.4 (Exterior, Wet) - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

4.1.5 (Oils/Greases) - level areas regularly exposed to automotive fluids, etc., so long as floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. **Review ANSI A326.3 2021 standard.**

Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet (EW).

Made in the USA.

Our head quarters are in Texas, but we manufacture in Tennessee! Made in the USA assures your project of on-time delivery, quality product, supply chain integrity, and reduced carbon foot print!

Build with AutoStone.

Our program supports Subaru dealers with the highest quality, most affordable and comprehensive floor tile system for your dealership project. Affordable, high-quality, and easy to do business with are what you will experience with AutoStone.

Warranty.

AutoStoneUSA tiles come with a materials warranty which confirms our high-quality product conforms with ANSI porcelain tile standards. If you suspect any tile as not being correct - DO NOT INSTALL IT! Take a picture and send it immediately to your Subaru support team. We will help you right away!

Installation.

AutoStoneUSA has tile installation recommendations with quality control (QC) standards which deliver better results. When you receive your project quote it will include our manufacturer recommended tile installation practices.

Cleaning & Maintenance.

AutoStoneUSA provides detailed and specific tile cleaning and maintenance recommendations. Ask for, or download the Subaru "Culture of Clean" which helps dealers maintain your dealership in a "like new" appearance.

Subaru Brand Info:

Website: AutoStoneUSA.com

Email: subaru@autostoneusa.com

Subaru Line: 214-393-4875

Request For Quote Info:

Website: AutoStoneUSA.com/RFQ-Subaru

Contact Information:

Aaron Standley & Barry Wells

subaru@autostoneusa.com

aaron@autostoneusa.com

barry@autostoneusa.com

Aaron: 214-393-4868

Barry: 214-393-4862

Main: 214-393-4875



SUBARU