

## EnviroShop12usa

smarter, better workshops



**MADE in USA**



**Series:** EnviroShop12USA  
**Color:** Alloy Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

**Series:** EnviroShop12USA  
**Color:** Smoke Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

**Series:** EnviroShop12USA  
**Color:** Carbon Black  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

### AutoStoneUSA Manufactured Declared Use

**4.1.3 Interior, Wet Plus (IW+)** - evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop12USA has a traction surface suitable for interior, wet plus applications, with good drainage. Floors walked on when wet should be level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.

### Declared Product Use & DCOF Requirement


Meets and exceeds .50 DCOF (wet) rating, appropriate for this environment of use:

**ANSI A326.3 Category:** 4.1.3 Interior, Wet Plus (IW+)

ANSI A326.3 4.1.3 Interior Wet Plus (IW+).

## technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.3 IW+ (Interior, Wet)	≥0.50 DCOF WET	≥0.50 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

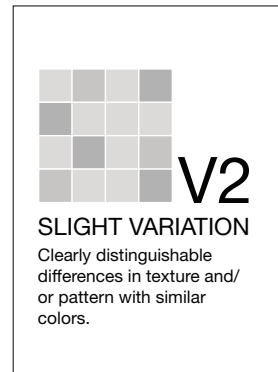

## DriveSeries12USA advanced surface technology




MADE in USA



**Series:** DriveSeries12USA  
**Color:** Alloy Grey  
**Finish:** Traction.3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).  
4.1.4 Exterior Wet (EW)  
4.1.5 Oils & Grease (O/G)  
**DCOF:** > .55 Wet



**Series:** DriveSeries12USA  
**Color:** Carbon Black  
**Finish:** Traction.3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).  
4.1.4 Exterior Wet (EW)  
4.1.5 Oils & Grease (O/G)  
**DCOF:** > .55 Wet

## Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard. **DCOF** - Minimum .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet and 4.1.5 Oils / Grease.

### ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

## technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

**V2**  
SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern with similar colors.

Note: Made in USA