

# autostone usa



GENESIS

## Genesis

### Showroom Tile Guide Book - GRD Preferred Partner

2025.01

Contains tile specifications, and program submittal information.



**MADE IN AMERICA**




[AutoStoneUSA.com](http://AutoStoneUSA.com)

© 2025 AutoStone Floor Systems, All Rights Reserved.

# Q2KD

## QUARRY TO KILN DISTRIBUTION MODEL

- 1** **LOCALLY SOURCED & LOCALLY QUARRIED**
  - Elimination of trans-ocean shipping
  - US jobs, shorter supply chain
- 2** **DOMESTICALLY PRODUCED & LOCALLY WAREHOUSED**
  - Less shipping
  - Reduced carbon footprint
- 3** **CONSOLIDATED SHIPPING DIRECT TO YOUR DEALERSHIP**
  - Eliminates distribution shipping
  - Reduces use of fossil fuel
- 4** **DOMESTICALLY PRODUCED SMARTER & EFFICIENT DISTRIBUTION**
  - Better for the environment
  - Saves you money

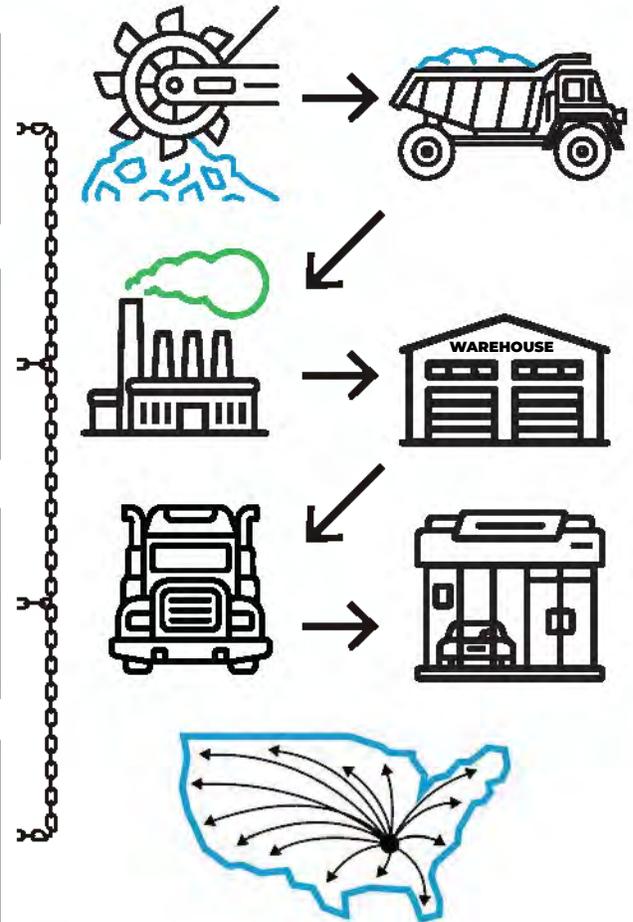



## USA Made Porcelain Tile

**Code:** TI-A  
**Series:** StudioWorks  
**Color:** Topo Light  
**Finish:** Honed | Natural  
**Size:** 32" x 32" U.S. Nominal Dimensions



MADE IN USA



## USA Made Porcelain Tile

**Code:** TI-B  
**Series:** StudioWorks  
**Color:** Anthracite Dark  
**Finish:** Honed | Natural  
**Size:** 32" x 32" U.S. Nominal Dimensions




## USA Made Porcelain Tile

**Code:** T-2  
**Series:** WoodPlank  
**Color:** ElmWood  
**Finish:** Natural  
**Size:** 8" x 48" X U.S. Nominal Dimensions



## River Rock Mosaic Tile

**Code:** PV-4  
**Series:** Mosaic  
**Color:** Black River Rock  
**Finish:** Natural  
**Size:** 12" x 12"

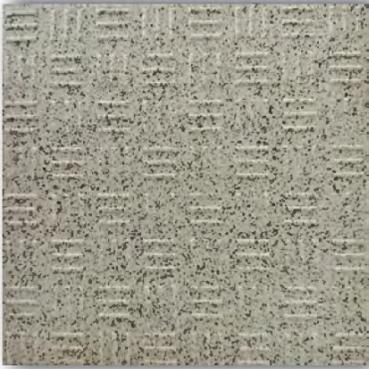

## Workshop & Service Floor Tile

**Code:** T-5 (floor)

**Series:** DriveSeries08USA

**Color:** Alloy Grey

**Finish:** Super.Grip3L.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+), 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).

driveseries  
USA



MADE IN USA



brightfinish  
ultra-cleanable technology



## Workshop & Service Floor Tile

**Code:** T-6 (floor)

**Series:** DriveSeries08USA

**Color:** Genesis-Carbon Black

**Finish:** Super.Grip3L.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+), 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).

driveseries  
USA



brightfinish  
ultra-cleanable technology



## Workshop & Service Wall Tile

**Code:** T-5A (wall | floor)

**Series:** eShop08USA

**Color:** Alloy Grey

**Finish:** Super.Grip.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+), 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).

eshop2usa  
better technology, better results



brightfinish  
ultra-cleanable technology



## Workshop & Service Floor Tile

**Code:** T-6A (wall | floor)

**Series:** eShop08USA

**Color:** Genesis-Carbon Black

**Finish:** Super.Grip.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+), 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).


eshop2usa  
better technology, better results




brightfinish  
ultra-cleanable technology

## SERVICE DEPARTMENT

PLAN, ELEVATION AND FINISHES

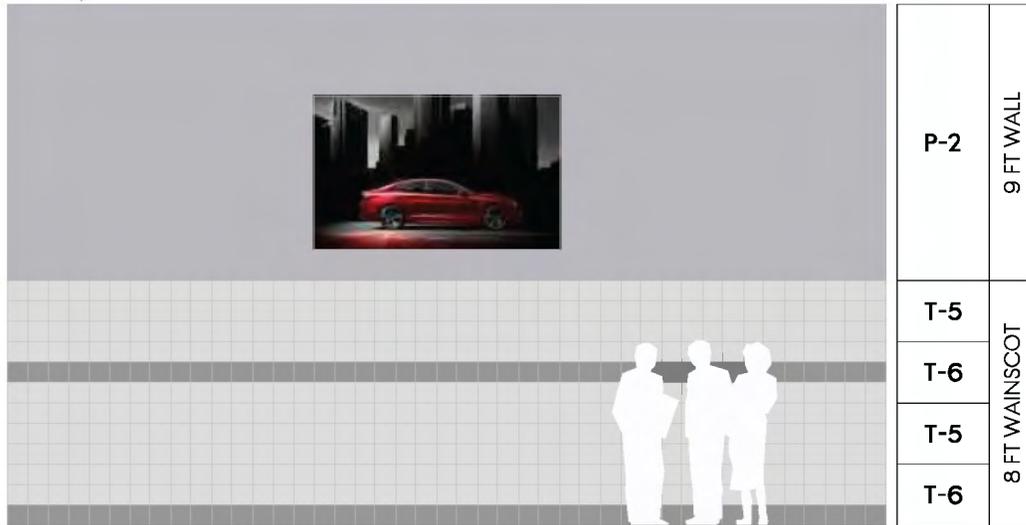

ELEVATION VIEW

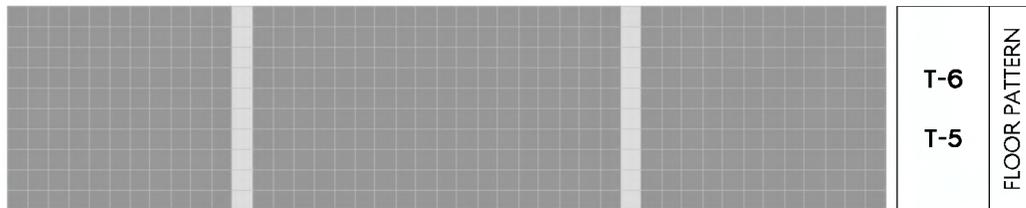



**Series:** DriveSeries08USA  
**Color:** Alloy Grey  
**Finish:** Super.Grip3L.Brightfinish



**Size:** 8" x 8" x 10 mm

**Surface Traction Conforms to:**

**ANSI A326.3 USE CATEGORY:**

- 4.1.3 Interior Wet Plus (IW+)
- 4.1.4 Exterior Wet (EW)
- 4.1.5 Oils/Grease (O/G)



**Tile Color:** Alloy Grey  
**Grout Color:** 78 Sterling Silver  
**Grout:** PermaColor  
 PermaClor Select

**Caulk:** Sanded Caulk  
 Acrylic Cauld

**Color:** 78 Sterling Silver



**Series:** DriveSeries08USA **Color:** Smoke Genesis - Carbon Black  
**Finish:** Super.Grip3L.Brightfinish



**Size:** 8" x 8" x 10 mm

**Surface Traction Conforms to:**

**ANSI A326.3 USE CATEGORY:**


- 4.1.3 Interior Wet Plus (IW+)
- 4.1.4 Exterior Wet (EW)
- 4.1.5 Oils/Grease (O/G)



**Tile Color:** Genesis - Carbon Balck  
**Grout Color:** 60 Dusty Grey  
**Grout:** PermaColor  
 PermaClor Select

**Caulk:** Sanded Caulk  
 Acrylic Caulk

**Color:** 60 Dusty Grey



8" x 8"\*

\* = U.S. Nominal Dimension. Dimensions may vary within (+) or (-) 2mm in production/sizes.

\*thickness tolerance is: (+) or (-) .5mm

### Material Availability

MADE INUSA | Product stocked in USA warehouse.  
 1 week preparation + ground shipping.



## Advantages

1. Advanced surface technology to better manage STF (slip, trip & fall) risk.
2. Surface has repeating lines elevated above the bed of the tile. Designed for greater foot, shoe-sole traction.
3. Will not permanently stain or darken when properly cleaned.

## Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments. Approved for use for all described environments below:

**4.1.1 (Interior, Dry)** - hard surface flooring not intended to be walked upon when wet shall have a dry DCOF value of 0.42\*

**4.1.2 (Interior, Wet)** - hard surface flooring not intended to be walked upon when wet shall have a dry DCOF value of 0.42\*

**4.1.3 (Interior, Wet Plus)** - examples of environments are: public showers, interior pool decks, locker rooms, covered exterior areas, steam rooms, "front of the house" applications in restaurants with an open kitchen, and in "front of the house" applications in quick service, fast-casual, and self-service restaurants, food areas in gas stations, and other similar areas where floors may be walked upon when wet if clean, maintained, and free of standing water or other contaminants. hard surface flooring not intended to be walked upon when wet shall have a dry DCOF value of 0.50\*

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. **Review ANSI A326.3 2021 standard.**

## Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.3 Exterior Wet.

## Description

A permanent enhanced porcelain technology floor system. Elevated traction provides a better surface to manage STF (slip, trip, and fall) risk in your automotive service drive, workshop and tech locker room shower areas. See declared uses below. Should be cleaned with frequent maintenance to keep clean and free of contamination and debris when dealership is operating. Spot spills should be removed immediately and not left on surface. Floor cleaning should include use of de-greasing chemical, floor scrubber sweeper machine with wet vacuum to suck-up dirty water and debris as part of cleaning process.

## Culture of Clean

See recommended cleaning practices in AutoStone "Culture of Clean" Guidebook.



**brightfinish**  
ultra-cleanable technology

### **Brightfinish Ultra-Cleanable Technology**

Brightfinish is a permanent sealant baked-in during kiln-firing process. The Brightfinish permanent sealant aids dealership with their cleaning practices by sealing surface micropores which trap and hold-on to rubber transfer, grease, oil or other contaminants.

### **Enhanced Impervious Surface Technology**

An impervious tile is the highest performance standard in the porcelain tile industry. The definition of an impervious tile is a surface that absorbs moisture between 0.5% to 0.001%. At AutoStone, we think that 0.5% is too much absorbency, and in an automotive dealership will cause tiles to absorb oil, grease, petroleum, gasoline and other contaminants. When this happens, your tile surface will darken over use and this leads to potential hazards such as STF (slip, trip and fall) events. Petroleum and oils soaked surfaces can pose other hazards when not properly removed with regularly scheduled and proper cleaning practices. With the addition of our brightfinish we enhance our impervious tiles and reduce their absorbency to levels at the lowest end of the spectrum (0.001% or less). This means nothing is absorbed by an AutoStone workshop or service drive floor tile. AutoStone workshop floor systems are premium floor systems which are designed to resist staining and be easier to clean.

### **Limitations**

Surface is a non-vitreous (impervious) enhanced porcelain tile. Oil, grease and all contaminants will remain on surface until properly cleaned and removed.

*Not for use in carwash areas where high volume water and/or high pressure water systems are used.*



## ANSI A326.3

## American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials—2021

### Introduction

*This introduction is not part of the American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials, ANSI A326.3.*

The dynamic coefficient of friction (DCOF) measurement provided in this standard is an evaluation of a hard surface flooring material under known conditions using a standardized testfoot material prepared according to a specific protocol. As such, it can provide a useful comparison of surfaces, but it does not predict the likelihood a person will or will not slip on a hard surface flooring material.

**4.1.4 - Exterior, Wet (EW) -**  
describes service drive &  
workshop environments with:

- \* roof.
- \* (4) walls.
- \* roll-up doors (California Bay)
- \* No doors.

**AutoStoneUSA shop floor series:**  
driveseries - is rated for Exterior, Wet  
Plus (EW) - see environment for use.

**driveseries!**  
advanced surface technology

Note: DCOF rating is > .55

AutoStone driveseries is the only industrial tile with brightfinish, a permanent sealant, baked-in during manufacturing retards permanent staining and aids dealership cleaning practices.

This is a critical function as having a high-rated DCOF that is difficult to clean results in degradation of DCOF values as oils, grease, rubber transfer and other elements embed in the tile surface, darkening the tile because it is difficult to clean.

Later, moisture reactivates the embedded chemicals which decrease the DCOF rating and the floor becomes slippery and poses STF risk to dealership operations.

**4.1.4 Exterior, Wet:** See Section 3.4. Product shall be manufacturer-declared for this category based on manufacturing parameters, internal quality control criteria, and manufacturer experience with similar surfaces. Attributes to consider include, but are not limited to, product size, texture, structure, and additionally in wet applications, drainage. Products meeting Exterior, Wet criteria may require frequent maintenance to keep clean.

#### INFORMATIVE NOTE:

*Possible Areas of Use: Subject to determination by specifier and the criteria in this standard, may include, but are not limited to, level outdoor living spaces including pool decks, walkways, patios, and sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained, and free of standing water or other contaminants.*

**INFORMATIVE NOTE:** *In the absence of superseding manufacturer-declared product use classification, excepting where measured DCOF is lower due to the impact of structure on the DCOF measurement, it is generally accepted that hard surface flooring in this category should have at least a minimum wet DCOF value of 0.55\*, with factors other than wet DCOF also taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface structure, effect of structure on the DCOF measurement, number of grout joints (see Informative Note in Section 9.1.7), traction-enhancing features, and intended use, in addition to the other criteria in this standard. As the suitability of the installed hard surface flooring depends significantly on such factors, a single normative DCOF limit value is not provided.*

**NOTE:** *Exterior, Wet labeling does not refer to frost resistance. For ceramic tile, refer to ANSI A137.1 for frost resistance criteria.*



**4.1.5 - Oils/Greases (O/G)** - describes service drive, workshops, oil & lube change environments with:

- \* roof.
- \* (4) walls.
- \* high-speed doors.
- \* roll-up doors.
- \* no doors.

See other requirements for site conditions for a tile product to be used.

**AutoStoneUSA shop floor series:**



driveseries - is rated for Oils/Greases (O/G) - see environment for use.

Note: DCOF rating is > .55

Automotive workshops, oil & lube changing and other environments with exposure to grease, oil and such are subject to this standard.

Only driveseries by AutoStone meets these new ANSI declared used standards.

**4.1.5**

**Oils/Greases:** See Section 3.4. Product shall be manufacturer-declared for this category where oil, grease, and/or fats may be present, based on manufacturing parameters, internal quality control criteria, and manufacturer experience with similar surfaces. Attributes to consider include, but are not limited to, product size, texture, structure, and drainage. Products meeting Oils/Greases criteria may require frequent maintenance to keep clean.

**INFORMATIVE NOTE:**

*Possible Areas of Use: Subject to determination by specifier and the criteria in this standard, may include, but are not limited to, level areas regularly exposed to automotive fluids, "back of the house" fast food or family style restaurants, food preparation areas with grills or deep-fry equipment, and any area where oil, grease, and/or fats may be present so long as such floors are level, regularly cleaned, maintained, and free of standing water and contaminant build-up.*

**INFORMATIVE NOTE:** *In the absence of superseding manufacturer-declared product use classification, excepting where measured DCOF is lower due to the impact of structure on the DCOF measurement, it is generally accepted that hard surface flooring in this category should have at least a minimum wet DCOF value of 0.55\* , with factors other than wet DCOF also taken in consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface structure, effect of structure on the DCOF measurement, number of grout joints (see Informative Note in Section 9.1.7), traction-enhancing features, and intended use, in addition to the other criteria in this standard. As the suitability of the installed hard surface flooring depends significantly on such factors, a single normative DCOF limit value is not provided.*

**Table 1: Product Use Classification**

Classification	Reference Category	Criteria
Interior, Dry	ID	≥ 0.42 dry DCOF* (per Section 10.1)
Interior, Wet	IW	≥ 0.42 wet DCOF* (per Section 9.1) or Manufacturer-Declared
Interior, Wet Plus	IW+	Manufacturer-Declared
Exterior, Wet	EW	Manufacturer-Declared
Oils/Greases	O/G	Manufacturer-Declared



**ANSI A326.3**

**American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials—2021**

**Introduction**

*This introduction is not part of the American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials, ANSI A326.3.*

The dynamic coefficient of friction (DCOF) measurement provided in this standard is an evaluation of a hard surface flooring material under known conditions using a standardized testfoot material prepared according to a specific protocol. As such, it can provide a useful comparison of surfaces, but it does not predict the likelihood a person will or will not slip on a hard surface flooring material.

**4.1.4 - Exterior, Wet (EW) -**  
describes service drive & workshop environments with:

- \* roof.
- \* (4) walls.
- \* roll-up doors (California Bay)
- \* No doors.

**AutoStoneUSA shop floor series:**  
driveseries - is rated for Exterior, Wet Plus (EW) - see environment for use.



Note: DCOF rating is > .55

AutoStone driveseries is the only industrial tile with brightfinish, a permanent sealant, baked-in during manufacturing retards permanent staining and aids dealership cleaning practices.

This is a critical function as having a high-rated DCOF that is difficult to clean results in degradation of DCOF values as oils, grease, rubber transfer and other elements embed in the tile surface, darkening the tile because it is difficult to clean.

Later, moisture reactivates the embedded chemicals which decrease the DCOF rating and the floor becomes slippery and poses STF risk to dealership operations.

**4.1.4**

**Exterior, Wet:** See Section 3.4. Product shall be manufacturer-declared for this category based on manufacturing parameters, internal quality control criteria, and manufacturer experience with similar surfaces. Attributes to consider include, but are not limited to, product size, texture, structure, and additionally in wet applications, drainage. Products meeting Exterior, Wet criteria may require frequent maintenance to keep clean.

**INFORMATIVE NOTE:**

*Possible Areas of Use: Subject to determination by specifier and the criteria in this standard, may include, but are not limited to, level outdoor living spaces including pool decks, walkways, patios, and sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained, and free of standing water or other contaminants.*

**INFORMATIVE NOTE:** *In the absence of superseding manufacturer-declared product use classification, excepting where measured DCOF is lower due to the impact of structure on the DCOF measurement, it is generally accepted that hard surface flooring in this category should have at least a minimum wet DCOF value of 0.55\*, with factors other than wet DCOF also taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface structure, effect of structure on the DCOF measurement, number of grout joints (see Informative Note in Section 9.1.7), traction-enhancing features, and intended use, in addition to the other criteria in this standard. As the suitability of the installed hard surface flooring depends significantly on such factors, a single normative DCOF limit value is not provided.*

**NOTE:** *Exterior, Wet labeling does not refer to frost resistance. For ceramic tile, refer to ANSI A137.1 for frost resistance criteria.*



**4.1.5 - Oils/Greases (O/G) -** describes service drive, workshops, oil & lube change environments with:

- \* roof.
- \* (4) walls.
- \* high-speed doors.
- \* roll-up doors.
- \* no doors.

See other requirements for site conditions for a tile product to be used.

**AutoStoneUSA shop floor series:**

**driveseries!**  
advanced surface technology

driveseries - is rated for Oils/Greases (O/G) - see environment for use.

Note: DCOF rating is > .55

Automotive workshops, oil & lube changing and other environments with exposure to grease, oil and such are subject to this standard.

Only driveseries by AutoStone meets these new ANSI declared used standards.

**4.1.5**

**Oils/Greases:** See Section 3.4. Product shall be manufacturer-declared for this category where oil, grease, and/or fats may be present, based on manufacturing parameters, internal quality control criteria, and manufacturer experience with similar surfaces. Attributes to consider include, but are not limited to, product size, texture, structure, and drainage. Products meeting Oils/Greases criteria may require frequent maintenance to keep clean.

**INFORMATIVE NOTE:**

*Possible Areas of Use: Subject to determination by specifier and the criteria in this standard, may include, but are not limited to, level areas regularly exposed to automotive fluids, "back of the house" fast food or family style restaurants, food preparation areas with grills or deep-fry equipment, and any area where oil, grease, and/or fats may be present so long as such floors are level, regularly cleaned, maintained, and free of standing water and contaminant build-up.*

**INFORMATIVE NOTE:** *In the absence of superseding manufacturer-declared product use classification, excepting where measured DCOF is lower due to the impact of structure on the DCOF measurement, it is generally accepted that hard surface flooring in this category should have at least a minimum wet DCOF value of 0.55\*, with factors other than wet DCOF also taken in consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface structure, effect of structure on the DCOF measurement, number of grout joints (see Informative Note in Section 9.1.7), traction-enhancing features, and intended use, in addition to the other criteria in this standard. As the suitability of the installed hard surface flooring depends significantly on such factors, a single normative DCOF limit value is not provided.*

**Table 1: Product Use Classification**

Classification	Reference Category	Criteria
Interior, Dry	ID	≥ 0.42 dry DCOF* (per Section 10.1)
Interior, Wet	IW	≥ 0.42 wet DCOF* (per Section 9.1) or Manufacturer-Declared
Interior, Wet Plus	IW+	Manufacturer-Declared
Exterior, Wet	EW	Manufacturer-Declared
Oils/Greases	O/G	Manufacturer-Declared

## AutoStoneUSA Support Team Members Email & Phone

Primary Email: [genesis@autostoneusa.com](mailto:genesis@autostoneusa.com)

Team Members For Quoting (on [genesis@autostoneusa.com](mailto:genesis@autostoneusa.com)) Email Account:  
[genesis@autostoneusa.com](mailto:genesis@autostoneusa.com)

## Request For On-Line Quote

Website: [www.autostoneusa.com/rfq-genesis](http://www.autostoneusa.com/rfq-genesis)

## Genesis Brand Page

Website: [www.autostoneusa.com/rfq-genesis](http://www.autostoneusa.com/rfq-genesis)

## Senior Program Contacts

Lezlie Ferrell

[lezlie@autostoneusa.com](mailto:lezlie@autostoneusa.com)

Mobile: 214-717-8936

Direct: 214-393-4861

Barry Wells


[barry@autostoneusa.com](mailto:barry@autostoneusa.com)

Mobile: 214-830-1206

Direct: 214-393-4862



WorkShop

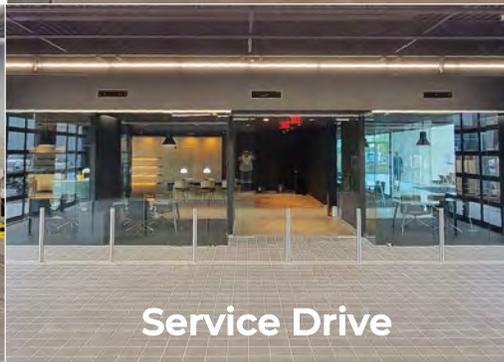

Service Drive



Showroom

**autostone**  
**usa**