

# autostone usa



## Kia 2.0 America Tile Guidebook

Kia Gallery Program  
[AutoStoneUSA.com/Kia](http://AutoStoneUSA.com/Kia)



**MADE IN AMERICA**




[AutoStoneUSA.com](http://AutoStoneUSA.com)

© 2025 AutoStone Floor Systems, All Rights Reserved.

# Q2KD

## QUARRY TO KILN DISTRIBUTION MODEL

- 1** **LOCALLY SOURCED & LOCALLY QUARRIED**
  - Elimination of trans-ocean shipping
  - US jobs, shorter supply chain
- 2** **DOMESTICALLY PRODUCED & LOCALLY WAREHOUSED**
  - Less shipping
  - Reduced carbon footprint
- 3** **CONSOLIDATED SHIPPING DIRECT TO YOUR DEALERSHIP**
  - Eliminates distribution shipping
  - Reduces use of fossil fuel
- 4** **DOMESTICALLY PRODUCED SMARTER & EFFICIENT DISTRIBUTION**
  - Better for the environment
  - Saves you money

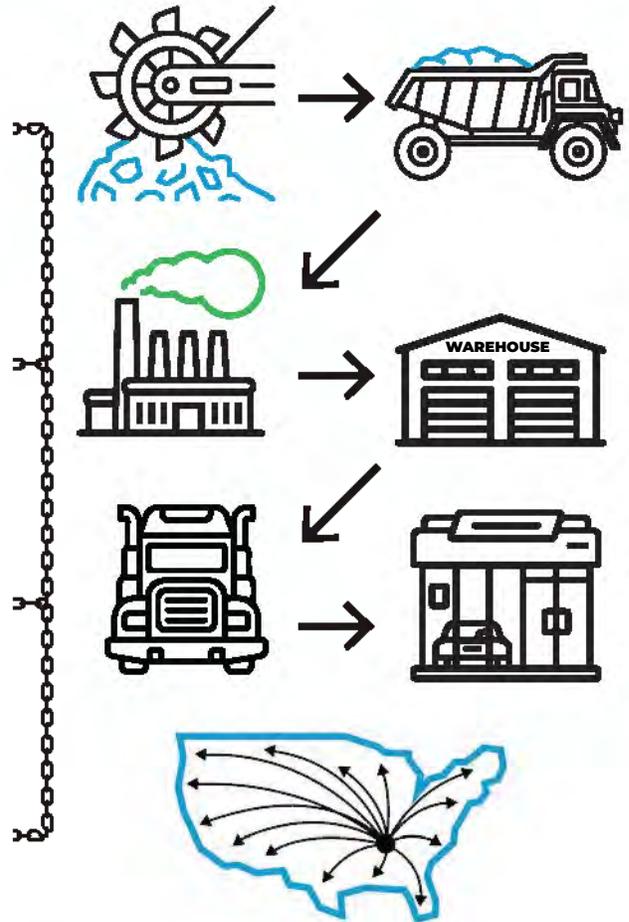



## T-1

**Series:** Concrete  
**Color:** Smoke  
**Finish:** Natural | Honed  
**Code:** AS.11036373232NH  
**Size:** 32" x 32" (U.S. Nominal Dimensions)



Important installation note for tile contractors: AutoStoneUSA, TCNA, NTCA, ANSI, and Kia 2.0 brand standards require tile installers open multiple boxes of tile prior to installing and "shuffle" tiles to assure a randomized tile pattern when installing.



## T-2

**Series:** Amberwood Plank  
**Color:** Maple Harvest  
**Finish:** Natural  
**Size:** 8" x 48" (U.S. Nominal Dimensions)



## T-3


**Series:** Station America - A  
**Color:** White  
**Finish:** Matte  
**Code:** ASUSA.25226E.PBA  
**Size:** 4" x 16" (U.S. Nominal Dimensions)



## T-4

**Series:** Station America - B  
**Color:** White  
**Finish:** Matte  
**Code:** ASUSA.25237E.PBA  
**Size:** 4" x 16" (U.S. Nominal Dimensions)





### T-3

**Series:** Station America - A  
**Color:** White  
**Finish:** Matte  
**Code:** ASUSA.25226E.PBA  
**Size:** 4" x 16" (U.S. Nominal Dimensions)

**Note:** this is a NEW approved Kia 2.0 T-3 & T-4 tile option by AutoStoneUSA.

This is approved for your Kia project and is to be installed in the vertical direction as shown below.


This is a GREAT and modern look that Kia dealers LOVE. Ask your AutoStone representative for more information.



### T-4

**Series:** Station America - B  
**Color:** White  
**Finish:** Matte  
**Code:** ASUSA.25237E.PBA  
**Size:** 4" x 16" (U.S. Nominal Dimensions)

**NOW - Made in USA!**

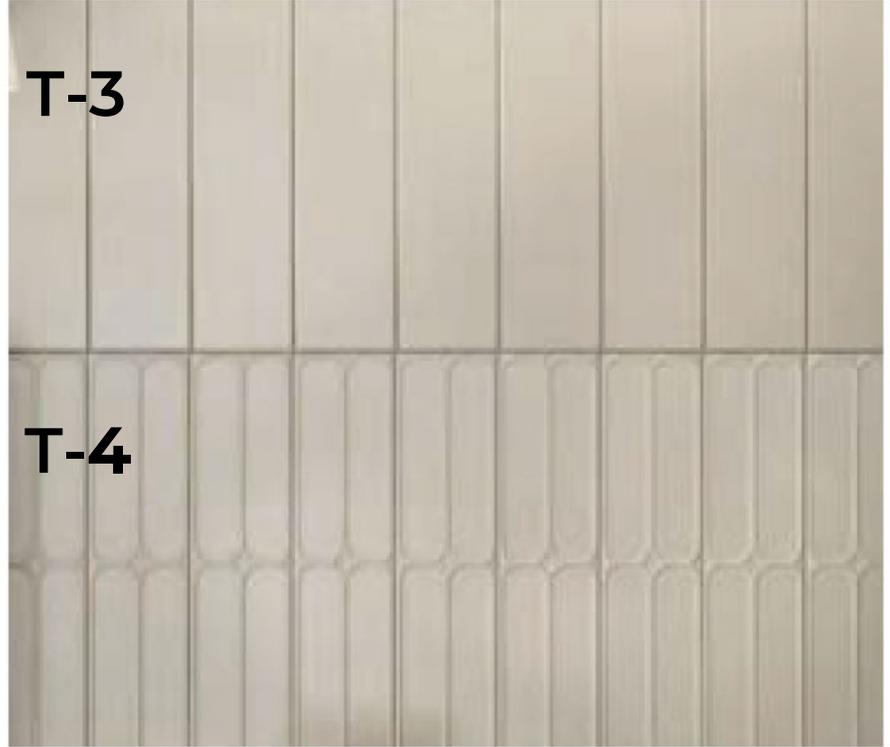



## LVT-1

**Series:** LV WoodPlank

**Color:** Maple Beech


**Finish:** Natural

**Size:** 7" x 48" (U.S. Nominal Dimensions)



**USA  
STOCKED**

See LVT Tile Guide for more details!




Click Installation




100% Waterproof



Sound Reduction



No Decay or termites



Heavy Foot Traffic Rated

## LV WOODPLANK AUTOMOTIVE RETAIL COLLECTION

### LVT (luxury vinyl tile) | SPC FLOORING

**SIZE:** 7" x 48"

**THICKNESS:** 6.5 MM

**WEAR LAYER:** 20 MIL | 0.50 MM

**PIECES:** 10 PER BOX

**COVERAGE:** 23.22 SQ FT / BOX | 2.16 M<sup>2</sup> / BOX

**INTERLOCK:** UNLIN<sup>®</sup> CLICK SYSTEM



## T-5 Tech Locker Walls


**Series:** *ShopWalls!*

**Color:** Stormy Grey

**Finish:** Glossy

**Surface:** Medium Traction

**Size:** 12" x 24" (U.S. Nominal Dimensions)

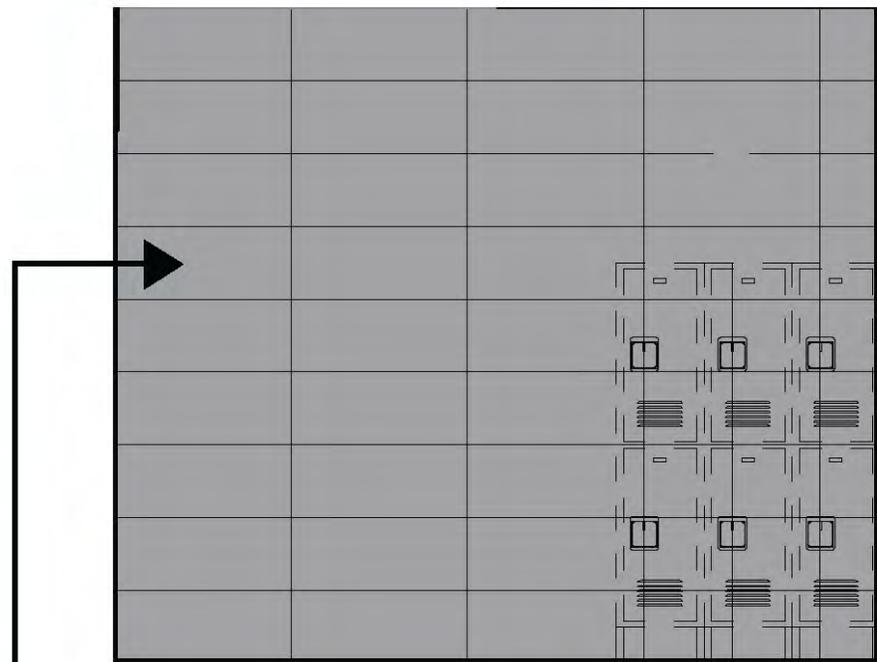

**Stormy Grey**



**Series:** DriveSeries08USA  
**Color:** Alloy Grey  
**Finish:** Super.Grip3L.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



# DriveSeries8USA

advanced surface technology

Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 78 SterlingSilver  
**Thinset:** LHT Plus




MADE IN USA



**Series:** DriveSeries08USA  
**Color:** Smoke Grey  
**Finish:** Super.Grip3L.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 42 Platinum  
**Thinset:** LHT Plus



**Series:** DriveSeries08USA  
**Color:** Genesis-Carbon Black  
**Finish:** Super.Grip3L.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 60 Dusty Grey  
**Thinset:** LHT Plus

### Advantages

1. Advanced surface technology to better manage STF (slip, trip & fall) risk.
2. Surface has repeating lines elevated above the bed of the tile. Designed for greater foot, shoe-sole traction.
3. Includes Super.Grip. Advanced technology with "nano-textured" particles which increase surface traction.
4. Includes brightfinish. It will not permanently stain or darken when properly cleaned.

### AutoStoneUSA Manufactured Declared Use

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 Exterior, Wet (EW)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 Oils/Greases (O/G)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up.

### Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating, appropriate for this environment of use: ANSI A326.3  
 4.1.3 Interior Wet Plus (IW+).  
 ANSI A326.3 4.1.4 Exterior Wet (EW).  
 ANSI A326.3 4.1.5 Oils/Grease (O/G).



**Series:** eShop08USA  
**Color:** Alloy Grey  
**Finish:** Super.Grip.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



# eShop8usa

better technology, better results

Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 78 SterlingSilver  
**Thinset:** LHT Plus




MADE IN USA



**Series:** eShop08USA  
**Color:** Smoke Grey  
**Finish:** Super.Grip.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 42 Platinum  
**Thinset:** LHT Plus



**Series:** eShop08USA  
**Color:** Genesis-Carbon Black  
**Finish:** Super.Grip.Brightfinish  
**Size:** 8" x 8"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 60 Dusty Grey  
**Thinset:** LHT Plus

### Advantages

1. Advanced surface technology to better manage STF (slip, trip & fall) risk.
2. Surface has flat textured surface with enhanced surface traction. Designed for greater foot, shoe-sole traction.
3. Includes Super.Grip. Advanced technology with "nano-textured" particles which increase surface traction.
4. Includes brightfinish. It will not permanently stain or darken when properly cleaned.

### AutoStoneUSA Manufactured Declared Use

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 Exterior, Wet (EW)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 Oils/Greases (O/G)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up.

### Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF rating, appropriate for this environment of use: ANSI A326.3  
 4.1.3 Interior Wet Plus (IW+).  
 ANSI A326.3 4.1.4 Exterior Wet (EW).  
 ANSI A326.3 4.1.5 Oils/Grease (O/G).



## eShop8usa

better technology, better results

**Series:** eShop08USA

**Color:** Alloy Grey

**Finish:** Super.Grip.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology



## DriveSeries8USA

advanced surface technology

**Series:** DriveSeries08USA

**Color:** Alloy Grey

**Finish:** Super.Grip3L.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology



**Series:** eShop08USA

**Color:** Smoke Grey

**Finish:** Super.Grip.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use category: 4.1.3

Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology



**Series:** DriveSeries08USA

**Color:** Smoke Grey

**Finish:** Super.Grip3L.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3


Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology

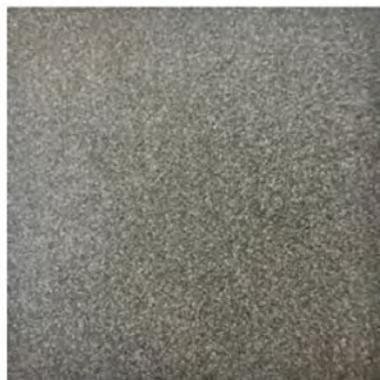

**Series:** eShp0

**Color:** Carbon/Genesis Black

**Finish:** Super.Grip.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology



**Series:** DriveSeries08TR

**Color:** Carbon/Genesis Black

**Finish:** Super.Grip3L.Brightfinish

**Size:** 8" x 8"

**Surface Traction Conforms to:**

ANSI A326.3 Use Category: 4.1.3

Interior Wet Plus (IW+). 4.1.4

Exterior Wet (EW).

4.1.5 Oils/Grease (O/G).



**brightfinish**  
ultra-cleanable technology




**Series:** EnviroShop12USA  
**Color:** Alloy Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"  
**Surface Traction Conforms to:**  
ANSI A326.3 Use Category:  
4.1.3 Interior Wet Plus (IW+).



# EnviroShop12usa

smarter, better workshops

Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 89 Smoke Grey  
**Thinset:** LHT Plus



MADE IN USA



**Series:** EnviroShop12USA  
**Color:** Smoke Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"  
**Surface Traction Conforms to:**  
ANSI A326.3 Use Category:  
4.1.3 Interior Wet Plus (IW+).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 42 Platinum  
**Thinset:** LHT Plus



**Series:** EnviroShop12USA  
**Color:** Carbon Black  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"  
**Surface Traction Conforms to:**  
ANSI A326.3 Use Category:  
4.1.3 Interior Wet Plus (IW+).



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 45 Raven  
**Thinset:** LHT Plus

## Advantages

1. Our original workshop floor with textured surface.
2. Surface texture is elevated above the surface bed for easier cleaning.
3. Will not permanently stain or darken when properly cleaned.
4. This product has:

# slipresistant

textured floor surfaces

## AutoStoneUSA Manufactured Declared Use

**4.1.3 Interior, Wet Plus (IW+)** - evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop12USA has a traction surface suitable for interior, wet plus applications, with good drainage. Floors walked on when wet should be level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.

## Declared Product Use & DCOF Requirement

Meets and exceeds .50 DCOF (wet) rating, appropriate for this environment of use:

ANSI A326.3 4.1.3 Interior Wet Plus (IW+).



**Series:** DriveSeries12USA  
**Color:** Alloy Grey  
**Finish:** Traction3L.Brightfinish  
**Size:** 12" x 12"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).


# DriveSeries12USA

advanced surface technology




MADE IN USA

Below: actual color varies, example is only representative




**Grout:** Laticrete Permacolor Select 89 Smoke Grey  
**Thinset:** LHT Plus

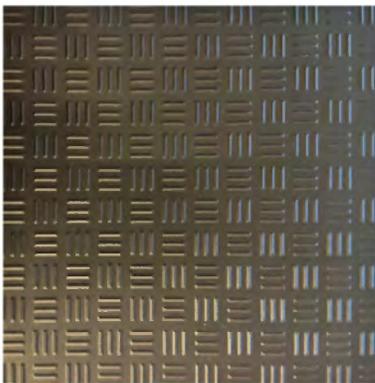

**Series:** DriveSeries12USA  
**Color:** Carbon Black  
**Finish:** Traction3L.Brightfinish  
**Size:** 12" x 12"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).

Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 45 Raven  
**Thinset:** LHT Plus



A permanent enhanced porcelain technology floor system. Elevated traction provides a better surface to manage STF (slip, trip, and fall) risk in your automotive service drive, workshop and tech locker room shower areas. See declared uses below. Should be cleaned with frequent maintenance to keep clean and free of contamination and debris when dealership is operating. Spot spills should be removed immediately and not left on surface. Floor cleaning should include use of de-greasing chemical, floor scrubber sweeper machine with wet vacuum to suck-up dirty water and debris as part of cleaning process.

### Advantages

1. Advanced surface technology to better manage STF (slip, trip & fall) risk.
2. Surface has repeating lines elevated above the bed of the tile. Designed for greater foot, shoe-sole traction.
3. Will not permanently stain or darken when properly cleaned.

### AutoStoneUSA Manufactured Declared Use

Evaluate for use in automotive workshop and service drive environments.

- 4.1.3 Interior, Wet Plus (IW+)** - evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms.
- 4.1.4 Exterior, Wet (EW)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.
- 4.1.5 Oils/Greases (O/G)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up.

### Declared Product Use & DCOF Requirement

Meets and exceeds .55 DCOF (wet) rating, appropriate for this environment of use:

- ANSI A326.3 4.1.3 Interior Wet Plus (IW+).
- ANSI A326.3 4.1.4 Exterior Wet (EW).
- ANSI A326.3 4.1.5 Oils/Grease (O/G).

### EnviroShop12usa smarter, better workshops

### DriveSeries12USA advanced surface technology



**Series:** EnviroShop12USA  
**Color:** Alloy Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3 Use Category: 4.1.3  
Interior Wet Plus (IW+).



**Series:** DriveSeries12USA  
**Color:** Alloy Grey  
**Finish:** Traction3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3 Use Category: 4.1.3  
Interior Wet Plus (IW+). 4.1.4  
Exterior Wet (EW).  
4.1.5 Oils/Grease (O/G).



**Series:** EnviroShop12USA  
**Color:** Smoke Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3 Use Category: 4.1.3  
Interior Wet Plus (IW+).




DriveSeries12USA  
Smoke Grey  
Currently Not Available



**Series:** EnviroShop12USA  
**Color:** Carbon Black  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3 Use Category: 4.1.3  
Interior Wet Plus (IW+).

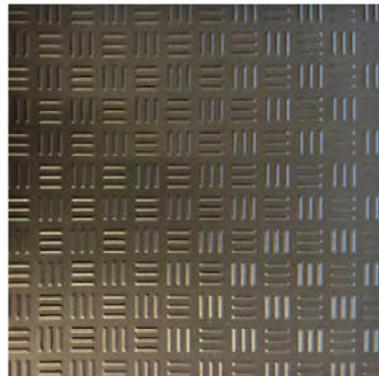

**Series:** DriveSeries12USA  
**Color:** Carbon Black  
**Finish:** Traction3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3 Use Category: 4.1.3  
Interior Wet Plus (IW+). 4.1.4  
Exterior Wet (EW).  
4.1.5 Oils/Grease (O/G).





**Series:** ClinkerShopUSA  
**Color:** Alloy Grey  
**Finish:** Super.Grip.Brightfinish  
**Size:** 4" x 8" x 1/2"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



**Series:** ClinkerShop8USA  
**Color:** Smoke Grey  
**Finish:** Super.Grip.Brightfinish  
**Size:** 4" x 8" x 1/2"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



**Series:** ClinkerShopUSA  
**Color:** Genesis-Carbon Black  
**Finish:** Super.Grip.Brightfinish  
**Size:** 4" x 8" x 1/2"  
**Surface Traction Conforms to:**  
 ANSI A326.3 Use Category: 4.1.3  
 Interior Wet Plus (IW+). 4.1.4  
 Exterior Wet (EW).  
 4.1.5 Oils/Grease (O/G).



# ClinkerShopUSA

Better technology, better performance, American made.




MADE IN USA


Below: actual color varies, example is only representative




**Grout:** Laticrete Permacolor Select 78 SterlingSilver  
**Thinset:** LHT Plus



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 42 Platinum  
**Thinset:** LHT Plus



Below: actual color varies, example is only representative



**Grout:** Laticrete Permacolor Select 60 Dusty Grey  
**Thinset:** LHT Plus

## Advantages

1. Advanced surface technology to better manage STF (slip, trip & fall) risk.
2. Surface has Super.Grip surface texture. These nano-granules provide an enhanced surface tension
3. Includes Brightfinish which aids dealers with their cleaning practices. This is a permanent sealant that retards permanent staining and keeps floors in a "like new" appearance.

## Manufactured Declared Uses

Evaluate for use in automotive workshop and service drive environments  
**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.  
**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. **Review ANSI A326.3 2021 standard.**

## Declared Product Use & DCOF Requirement

Meets and exceeds 55 DCOF rating as required for ANSI A326.3 4.1.3 Exterior Wet.

# INDUSTRIAL ENVIRONMENT LVT LARGE (18" x 36") FORMAT FLOOR & WALL PANELS

**RA3**


Great for Parts, Storage Areas, Janitorial, Lunch & Break Rooms, Tech Locker Room Floors & Walls.

Wainscoting for Hallways, WorkShop Areas & All Back-Office Areas.

18" x 36" large format panels with rugged diamond plated surface texture to help reduce STF (slip, trip, and fall) risk.



Grey Concrete

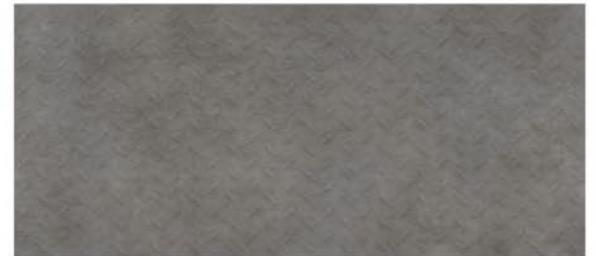

Deep Concrete



**SURFACE CAMOUFLAGE**

Surface Camouflage enhances the beauty of your floor by reducing the negative visual daily contaminants generated during your workday.



**SCRATCH RESISTANT SURFACE**

Will not dent, scratch, or chip like metal, concrete, epoxy, tile, or other finishes.



**CHEMICAL RESISTANT SURFACE**

Resistant to water, gasoline, MEK, acetone, motor oil, isopropanol, acetic acid, ammonia, sodium chloride solution, and other chemicals.\*



**IMPACT GUARD SURFACE**

Strong, rugged, and stands up to blunt force impact better than any other surface.



**RA IS RECOMMENDED FOR CLIMATE CONTROLLED ENVIRONMENTS WITH A ROOF, WALL AND DOORS FLOOD SAFE, WATER RESISTANT, + SOUND REDUCTION**



**CLIMATE-CONTROLLED ENVIRONMENTS**

For environments with a temperature room range of 40- and 104- degrees.\*



**FLOOD SAFE & WATER RESISTANT**

Panels are moisture-resistant and can be submerged for days and remain bonded.



**LESS NOISE BETTER CONDITIONS**

Reduces noise decibels (dB) and improves working conditions.

So easy to install that there is no need for expensive, highly skilled labor.

So fast that you can use immediately upon installation; no cure time required.

Panels are installed edge-to-edge, and wall-to-wall for a seamless, beautiful floor.

Commercial workshops install in 1-2 days (depending on size).



**RA3**

## RA3 PANEL PRICE

**Troweled Adhesive Method\***

\*Troweled adhesive will be added to your quote



**Thickness: 3mm**

**Size: 18" x 36" Panel (4.5 SQFT Per Panel)**


**Features Included:**

- Rated for climate-controlled environments (home garage)
- Surface Camouflage
- Scratch Resistant Surface
- Chemical Resistant Surface
- Impact Guard Surface
- Industrial Strength 30 mil Wear-Layer


## Wall Tiles



**Series:** Premier  
**Color:** Bright White Ice  
**Finish:** Glossy  
**Size:** 3" x 6" or 6" x 6" and 12" x 24"  
**Product Code (3" x 6"):**  
 WT-1 (Alternate)  
**Product Code (6" x 6"):**  
 WT-3 (Alternate)  
**Product Code (12" x 24"):**  
 WT-3 (Alternate)



V1

**UNIFORM APPEARANCE**  
 Differences among pieces from the same production runs are minimal

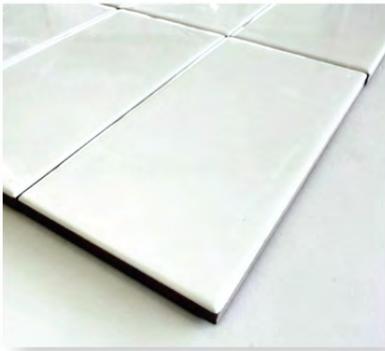

### 03" x 06" Subway Series

White Glossy

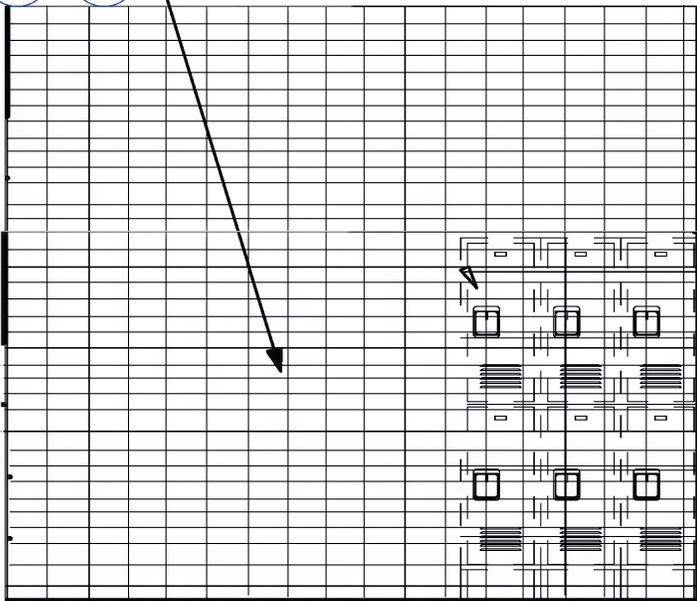

## Subway Tile for Restroom & Tech Walls

**Color:** White  
**Finish:** Glossy  
**Size:** 03" x 06" (nominal)



## Service & Tech Restroom Areas Wall Tile

**Series:** ShopWall!  
**Color:** Granita Grey  
**Finish:** Satin  
**Size:** 8" X 8" U.S. Nominal Dimensions .



## Service & Tech Restroom Areas Wall Tile

**Series:** ShopWall!  
**Color:** Anthracite Grey  
**Finish:** Satin  
**Size:** 8" X 8" U.S. Nominal Dimensions .

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft <sup>2</sup>	8mm ≥300 lb/ft <sup>2</sup> 10mm ≥400 lb/ft <sup>2</sup>
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# The AutoStoneUSA Kia Team



General and immediate online help.  
You can find most information including quotes  
on our Kia Brand Webpage

Kia Sales Team


[kia@autostoneusa.com](mailto:kia@autostoneusa.com)

<https://autostoneusa.com/kia/>

214-393-4875 phone



If you are a flooring  
contractor and  
need pricing



If you are the brand,  
brand architect, or  
brand CM



If you are a car  
dealer

Lezlie Ferrell, Director of Sales

[lezlie@autostoneusa.com](mailto:lezlie@autostoneusa.com)

214-393-4861 direct dial



If you are the  
GC  
builder/contractor

Barry Wells, President

[barry@autostoneusa.com](mailto:barry@autostoneusa.com)

214-393-4862 direct dial



If you are the  
AOR  
local architect

Rachel Metcalf, Architectural Liaison

[rachel@autostoneusa.com](mailto:rachel@autostoneusa.com)

214-387-19551 direct dial

Lezlie Ferrell, Director of Sales

[lezlie@autostoneusa.com](mailto:lezlie@autostoneusa.com)

214-393-4861 direct dial