

autostone usa



LVT-1 - Luxury Vinyl Tile

Series: Sincere WoodPlank

Color: Birch Maple

7.25" x 48" x 2.5 mm (thick)

Wear Layer: 22 MIL | 0.55 mm

SIZE: 7.25" x 48"


THICKNESS: 2.5 MM

WEAR LAYER: 22 MIL | 0.55 MM


PIECES: 16 PER CARTON

COVERAGE: 38.66 SQ FT / 3.59 M² / CARTON


INSTALLATION: DRY BACK LVT

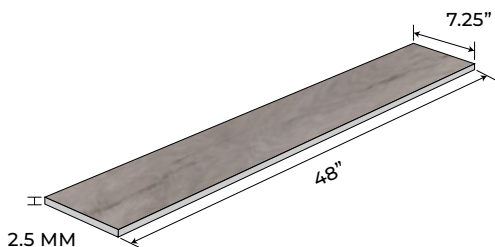

7.25" x 48" x 2.5 mm
184.15.00 mm x 1219.2 mm x 2.5 mm
22 MIL / 0.55 mm

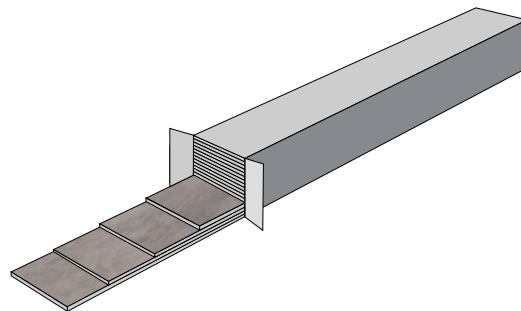

16 PCS / CARTON
38.66 SQ.FT / CARTON
3.59 SQ.M / CARTON

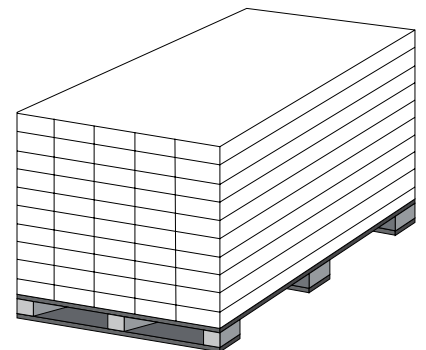

50 CARTONS / PALLET

Loose Lay Luxury Vinyl Tiles For Commercial and Light Industry
PUR Polyurethane Reinforcement | Product Standard: ISO 10582


CERTIFICATION & CLASSIFICATION	STANDARD	WOODPLANK LVT - AUTOSTONE
TYPE OF FLOOR COVERING	ISO 10582	LUXURY VINYL TILE
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	32 / 42

TECHNICAL CHARACTERISTICS	STANDARD	PROSPERITY
TOTAL THICKNESS	EN ISO 2436 (EN 428)	2.5 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.55 MM 22 MIL
SURFACE TREATMENT	UV TREATED	PUR
MASS PER UNIT AREA	EN ISO 23997 (EN 430)	4.2 KG/M ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) Planks box	7.25" X 48" 16 PLANKS / CARTON = 38.66 SF 184.15 X 1219.2 MM 16 PLANKS / CARTON = 3.59 M ²

TECHNICAL PERFORMANCE	STANDARD	PROSPERITY
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤0.10%
REACTION TO FIRE	EN 13501 – 1	CLASS BFL-S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	≤ 0.05M
WEAR RESISTANCE	EN 660-1	GROUP T
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2MM
LIGHT FASTNESS	EN ISO 105 – B02	≥ 6
RESISTANCE TO STAIN	EN 438	GRADE 5
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE
SLIP RESISTANCE	DIN 51130 EN 13893	R10 CLASS DS
ELECTRICAL PROPERTIES	EN 1815 EN 1081	<2KVON CONCRETE R1 > 10 ¹⁰ Ω
THERMAL RESISTANCE	EN ISO 10456	0.07 M2 K/W




ISO 9001
ISO 14001
ISO 18001



LAYER DIAGRAM

OVER ALL THICKNESS 2.5 MM

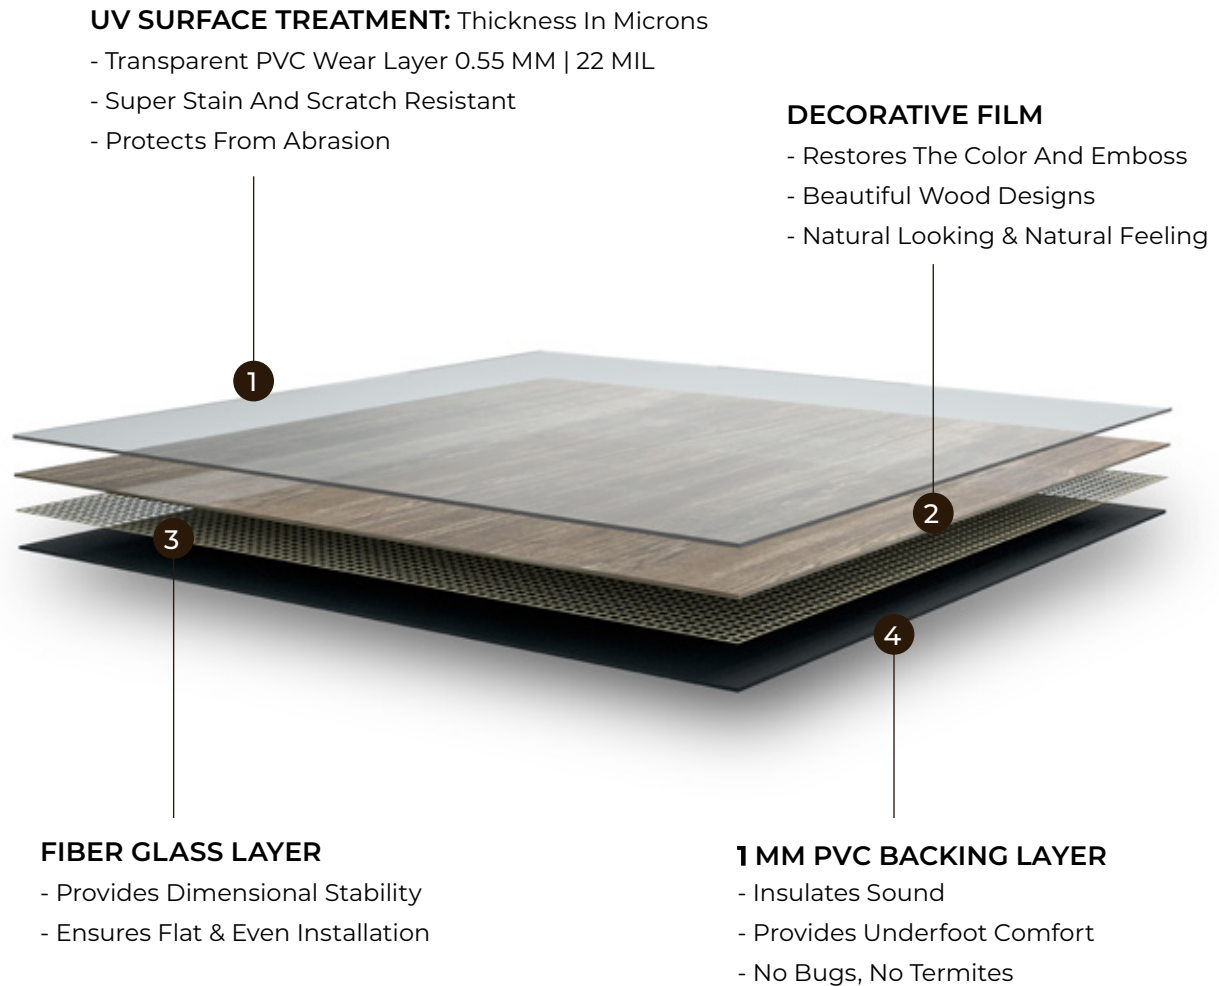

FEATURES & BENEFITS



Superior Scratch
& Stain Resistant



Zero
Maintenance




Easy
Clean



Natural Looking
Design



Heavy
Foot Traffic



Easy
Installation

APPLICATIONS



Corporate
Offices



Commercial
Establishments



Retail
Outlets



Hotels &
Hospitality