

# autostone usa



## Honda Blue Stage Technical Specifications Guidebook


Version 2026.5

---

Honda Blue Stage Program  
[AutoStoneUSA.com/Honda](https://AutoStoneUSA.com/Honda)



**MADE IN AMERICA**

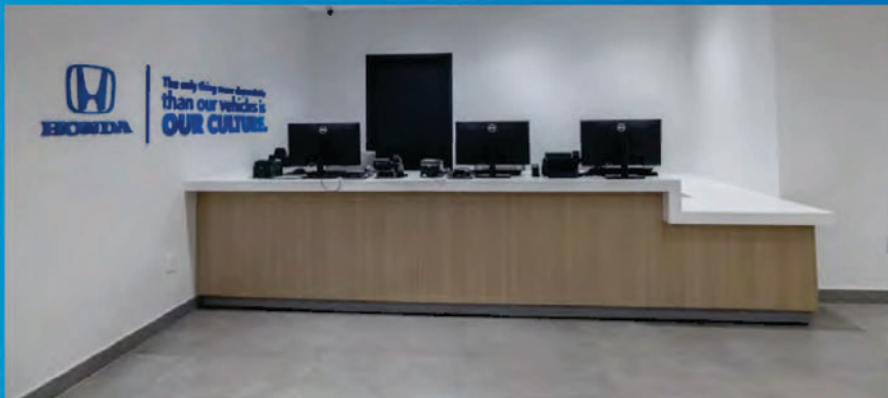

[AutoStoneUSA.com](https://AutoStoneUSA.com)

© 2026 AutoStone Floor Systems, All Rights Reserved.





# Q2KD



## QUARRY TO KILN DISTRIBUTION MODEL

**1** **LOCALLY SOURCED & LOCALLY QUARRIED**

- Elimination of trans-ocean shipping
- US jobs, shorter supply chain

**2** **DOMESTICALLY PRODUCED & LOCALLY WAREHOUSED**


- Less shipping
- Reduced carbon footprint

**3** **CONSOLIDATED SHIPPING DIRECT TO YOUR DEALERSHIP**

- Eliminates distribution shipping
- Reduces use of fossil fuel

**4** **DOMESTICALLY PRODUCED SMARTER & EFFICIENT DISTRIBUTION**

- Better for the environment
- Saves you money

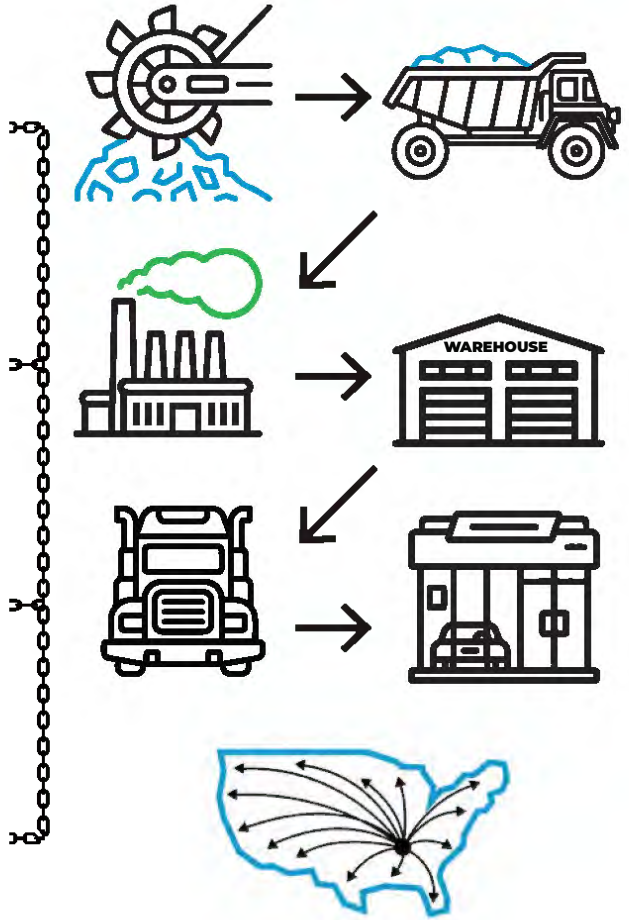



**T-1 Showroom Tile**

**Series:** Concrete  
**Color:** Anthracite  
**Finish:** Natural | Honed  
**Size:** 32" X 32" (U.S. Nominal Dimensions)  
**V-Rating:** V-3



**T-3 Showoom Tile**

**Series:** Concrete  
**Color:** Smoke  
**Finish:** Natural | Honed  
**Size:** 32" x 32" (U.S. Nominal Dimensions)  
**V-Rating:** V-2 / V-3



**T-1 Showroom Tile**

**Series:** Blue Stage  
**Color:** Metro Black  
**Finish:** Natural | Honed  
**V-Rating:** V-1  
**Size:** 12" x 24" (U.S. Nominal Dimensions)  
**Size:** 24" x 24" (U.S. Nominal Dimensions)




**T-3 Showroom Tile**

**Series:** Forms2.0  
**Color:** Silver Grey  
**Finish:** Natural | Honed  
**V-Rating:** V-2 / V-3  
**Size:** 32" x 32" (U.S. Nominal Dimensions)

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.



SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA
	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL
SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40% Rectified
WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40% Rectified
WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25% Rectified
WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50% Calibrated
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



## T-4 Showroom Customer Area Porcelain Tile

**Series:** WoodPlank  
**Color:** Natural Maple  
**Finish:** Natural  
**Size:** 8" X 48" (U.S. Nominal Dimensions)



MADE IN USA



MODERATE VARIATION  
 While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.

## Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES	
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	ANSI A326.3	≥0.42 WET	≥0.42 WET	
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



## T-4 Showroom Customer Area Porcelain Tile

**Series:** MoodWood Plank  
**Color:** Gaineswood Honey  
**Finish:** Natural  
**Size:** 6" X 36" (U.S. Nominal Dimensions)




### Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	<b>CERTIFIED PORCELAIN TILE</b>	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

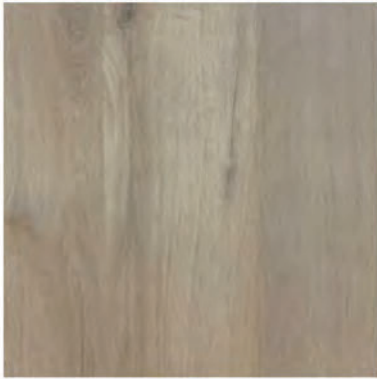

## T-4 Showroom Customer Area

### LVT Option

LVT WOODPLANK AUTOM RETAIL COLLECTION LVT (luxury vinyl tile)

SIZE: 7.25" x 48"

THICKNESS: 2.5 MM

WEAR LAYER: 22MIL | 0.55 MM

NOTE: Glue Down LVT Material - Adhesive NOT supplied by AutoStoneUSA

Series: LVT

Color: Birch Maple

Finish: Natural

Size: 7.25 x 48" x 2.5 mm

(U.S. Nominal Dimensions)

### FEATURES & BENEFITS



Superior Scratch & Stain Resistant



Zero Maintenance




Easy Clean



Natural Looking Design



Heavy Foot Traffic



Easy Installation

### APPLICATIONS



Corporate Offices



Commercial Establishments



Retail Outlets



Hotels & Hospitality

SIZE: 7.25" x 48"

THICKNESS: 2.5 MM

WEAR LAYER: 22 MIL | 0.55 MM

PIECES: 6 PER CARTON

COVERAGE: 38.66 SQ FT / 3.59 M2 / CARTON

INSTALLATION: DRY BACK LVT


#### UV SURFACE TREATMENT: Thickness In Microns

- Transparent PVC Wear Layer 0.55 MM | 22 MIL
- Super Stain And Scratch Resistant
- Protects From Abrasion

#### DECORATIVE FILM

- Restores The Color And Emboss
- Beautiful Wood Designs
- Natural Looking & Natural Feeling

OVER ALL THICKNESS 2.5 MM

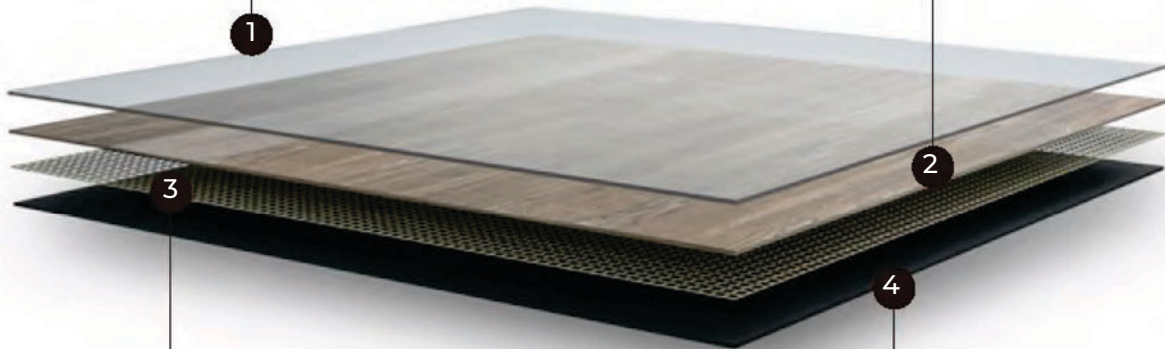

#### FIBER GLASS LAYER

- Provides Dimensional Stability
- Ensures Flat & Even Installation

#### 1 MM PVC BACKING LAYER

- Insulates Sound
- Provides Underfoot Comfort
- No Bugs, No Termites



**T-2 Wall Tile**

Series: Blue Stage  
 Color: Sea Pearl  
 Finish: Natural | Honed  
 V-Rating: V1 / V2  
 Size: 12" x 24"  
 Size: 24" x 24"

(U.S. Nominal Dimensions)



12"x24"



6"x12" Cove base



3"x12" Bullnose



**T-2 Wall Tile**

Series: Blue Stage  
 Color: Metro Black  
 Finish: Natural | Honed  
 V-Rating: V1  
 Size: 12" x 24"  
 Size: 24" x 24"

(U.S. Nominal Dimensions)



12"x24"



6"x12" Cove base



3"x12" Bullnose




V1

V2

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.

SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA
	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL
CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET
STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf
RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40% Rectified
WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40% Rectified
WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25% Rectified
WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50% Calibrated
WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50% Calibrated
THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

EnviroShop12usa  
smarter, better workshops



MADE in USA

**AutoStoneUSA Manufactured Declared Use**

**4.1.3 Interior, Wet Plus (IW+)** - evaluate for interior use in automotive workshop and service drive environments with high speed doors and tech locker rooms. Enviroshop12USA has a traction surface suitable for interior, wet plus applications, with good drainage. Floors walked on when wet should be level, clean, maintained and free of standing water or other contaminants. Should be cleaned with frequent maintenance to keep clean.



**Series:** EnviroShop12USA  
**Color:** Alloy Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

**Series:** EnviroShop12USA  
**Color:** Smoke Grey  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

**Series:** EnviroShop12USA  
**Color:** Carbon Black  
**Finish:** Traction.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).

**DCOF:** > .50 Wet

**Declared Product Use & DCOF Requirement**

Meets and exceeds .50 DCOF (wet) rating, appropriate for this environment of use:

**ANSI A326.3 Category:** 4.1.3 Interior, Wet Plus (IW+)

ANSI A326.3 4.1.3 Interior Wet Plus (IW+).

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.3 IW+ (Interior, Wet)	≥0.50 DCOF WET	≥0.50 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

**V2**  
SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern with similar colors.

# DriveSeries12USA

advanced surface technology




MADE in USA



**Series:** DriveSeries12USA  
**Color:** Alloy Grey  
**Finish:** Traction.3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).  
4.1.4 Exterior Wet (EW)  
4.1.5 Oils & Grease (O/G)  
**DCOF:** > .55 Wet



**Series:** DriveSeries12USA  
**Color:** Carbon Black  
**Finish:** Traction.3L.Brightfinish  
**Size:** 12" x 12"

**Surface Traction Conforms to:**  
ANSI A326.3  
4.1.3 Interior Wet Plus (IW+).  
4.1.4 Exterior Wet (EW)  
4.1.5 Oils & Grease (O/G)  
**DCOF:** > .55 Wet

## Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.


**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard. **DCOF** - Minimum DCOF is .55 DCOF rating as required for ANSI A326.3 4.1.4 Exterior Wet and 4.1.5 Oils / Grease.

### ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

## technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

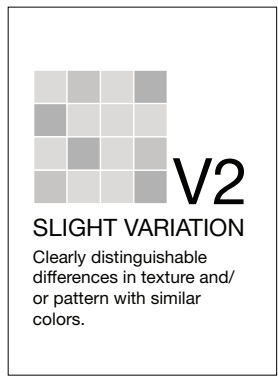

Note: Made in USA




MADE in USA



Alloy Grey

Size: 08" x 08" x 10 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)



Smoke Grey

Size: 08" x 08" x 10 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)



Genesis-Carbon Black

Size: 08" x 08" x 10 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)

## Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.


**DCOF** - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

### ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

## technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
Note:  in USA	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

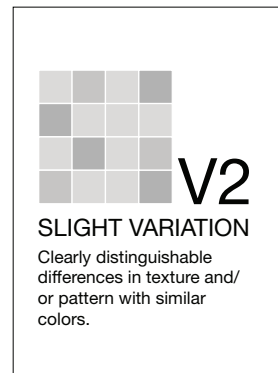

DriveSeries8USA  
advanced surface technology



MADE in USA



Alloy Grey

Size: 08" x 08" x 10 mm

Finish: Super.Grip.3L.BrightFinish

ANSI A362.3 Use Environment:

4.1.3 IW+ (Interior Wet, Pus)

4.1.4 EW (Exterior Wet)

4.1.5 O/G (Oils & Grease)



Smoke Grey

Size: 08" x 08" x 10 mm

Finish: Super.Grip.3L.BrightFinish

ANSI A362.3 Use Environment:

4.1.3 IW+ (Interior Wet, Pus)

4.1.4 EW (Exterior Wet)

4.1.5 O/G (Oils & Grease)



Genesis-Carbon Black

Size: 08" x 08" x 10 mm

Finish: Super.Grip.3L.BrightFinish

ANSI A362.3 Use Environment:

4.1.3 IW+ (Interior Wet, Pus)

4.1.4 EW (Exterior Wet)

4.1.5 O/G (Oils & Grease)

Product Use Category 4.1.4  
Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.


**DCOF** - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
Note:	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

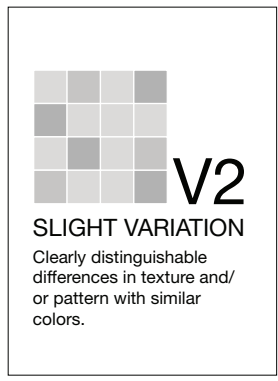

# ClinkerShopUSA

Better technology, better performance, American made.




MADE in USA



Alloy Grey

Size: 04" x 08" x 14 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)



Smoke Grey

Size: 04" x 08" x 14 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)



Genesis-Carbon Black

Size: 04" x 08" x 14 mm  
Finish: Super.Grip.BrightFinish  
ANSI A362.3 Use Environment:  
4.1.3 IW+ (Interior Wet, Pus)  
4.1.4 EW (Exterior Wet)  
4.1.5 O/G (Oils & Grease)

## Product Use Category 4.1.4 Exterior Wet (EW) & 4.1.5 (O/G)

Evaluate for use in automotive workshop and service drive environments.

**4.1.4 (Exterior, Wet)** - level outdoor spaces walkways, sidewalks, where such floors may be walked upon when wet (excluding ice or snow) if level, clean, maintained and free of standing water or other contaminants.

**4.1.5 (Oils/Greases)** - level areas regularly exposed to automotive fluids, etc., so long as such floors are level, regularly cleaned, maintained and free of standing water and contaminant build-up. Consult with your architect to determine dealership practices. Review ANSI A326.3 2021 standard.


**DCOF** - Meets and exceeds .55 DCOF rating as required for ANSI A326.3 4.1.4. Exterior Wet and 4.1.5 Oils / Grease.

### ANSI A326.3 Declared Use:

4.1.4 Exterior, Wet Plus (IW+) - and - 4.1.5 Oils/Grease (O/G)

## technical specifications

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONEUSA
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3 4.1.4 EW (Exterior, Wet) 4.1.5 O/G (Oils/Grease)	≥0.55 DCOF WET	≥0.55 DCOF WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft2	8mm ≥300 lb/ft2 10mm ≥400 lb/ft2
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
Note:  in USA	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

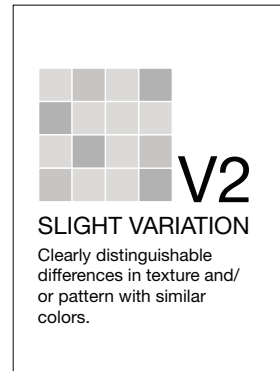

**INDUSTRIAL ENVIRONMENT LVT LARGE (18" x 36") FORMAT FLOOR & WALL PANELS**

**RA3**


Great for Parts, Storage Areas, Janitorial, Lunch & Break Rooms, Tech Locker Room Floors & Walls.

Wainscoting for Hallways, WorkShop Areas & All Back-Office Areas.

18" x 36" large format panels with rugged diamond plated surface texture to help reduce STF (slip, trip, and fall) risk.



Grey Concrete

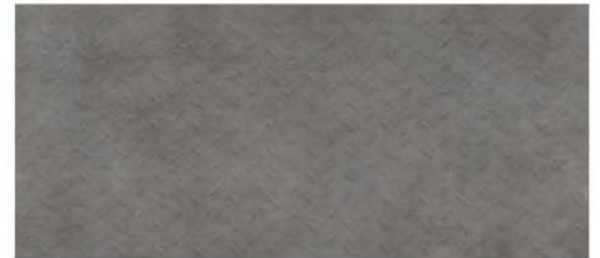

Deep Concrete



**SURFACE CAMOUFLAGE**

Surface Camouflage enhances the beauty of your floor by reducing the negative visual daily contaminants generated during your workday.



**SCRATCH RESISTANT SURFACE**

Will not dent, scratch, or chip like metal, concrete, epoxy, tile, or other finishes.



**CHEMICAL RESISTANT SURFACE**

Resistant to water, gasoline, MEK, acetone, motor oil, isopropanol, acetic acid, ammonia, sodium chloride solution, and other chemicals.\*



**IMPACT GUARD SURFACE**

Strong, rugged, and stands up to blunt force impact better than any other surface.



**RA IS RECOMMENDED FOR CLIMATE CONTROLLED ENVIRONMENTS WITH A ROOF, WALL AND DOORS FLOOD SAFE, WATER RESISTANT, + SOUND REDUCTION**



**CLIMATE-CONTROLLED ENVIRONMENTS**

For environments with a temperature room range of 40- and 104- degrees.\*



**FLOOD SAFE & WATER RESISTANT**

Panels are moisture-resistant and can be submerged for days and remain bonded.



**LESS NOISE BETTER CONDITIONS**

Reduces noise decibels (dB) and improves working conditions.

So easy to install that there is no need for expensive, highly skilled labor.

So fast that you can use immediately upon installation; no cure time required.

Panels are installed edge-to-edge, and wall-to-wall for a seamless, beautiful floor.

Commercial workshops install in 1-2 days (depending on size).



**RA3**

**RA3 PANEL PRICE**

Troweled Adhesive Method\*

\*Troweled adhesive will be added to your quote

---

**Thickness:** 3mm


**Size:** 18" x 36" Panel (4.5 SQFT Per Panel)

**Features Included:**

- Rated for climate-controlled environments (home garage)
- Surface Camouflage
- Scratch Resistant Surface
- Chemical Resistant Surface
- Impact Guard Surface
- Industrial Strength 30 mil Wear-Layer

## Wall Tiles

**Series:** Premier  
**Color:** Bright White Ice  
**Finish:** Glossy  
**Size:** 3" x 6" or 6" x 6" and 12" x 24"  
**Product Code (3" x 6"):**  
 WT-1 (Alternate)  
**Product Code (6" x 6"):**  
 WT-3 (Alternate)  
**Product Code (12" x 24"):**  
 WT-3 (Alternate)




## technical specifications

**Declared Use:** Wall Tile Only - Glazed Surface Wall Tile

### TECHNICAL SPECIFICATIONS

This product meets or exceeds all standards described in ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	AutoStoneUSA Results	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
	<b>CERTIFIED PORCELAIN TILE</b> 0.5% or less water absorption	ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	



## Restroom & Tech Walls

**Color:** Simply White

**Finish:** Satin

**Nominal Size:** 12" x 24" (nominal)

**Actual Size:** 11 13/16" x 23 10/16"

**Color:** Stormy Grey

**Finish:** Glossy

**Nominal Size:** 12" x 24" (nominal)













**Actual Size:** 11 13/16" x 23 10/16"

V1

**UNIFORM APPEARANCE**

Differences among pieces from the same production runs are minimal

### TECHNICAL SPECIFICATIONS

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft <sup>2</sup>	8mm ≥300 lb/ft <sup>2</sup> 10mm ≥400 lb/ft <sup>2</sup>
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.















## Service & Tech Restroom Areas Wall Tile

**Series:** ShopWall!  
**Color:** Granita Grey  
**Finish:** Satin  
**Size:** 8" X 8" U.S. Nominal Dimensions .



## Service & Tech Restroom Areas Wall Tile

**Series:** ShopWall!  
**Color:** Anthracite Grey  
**Finish:** Satin  
**Size:** 8" X 8" U.S. Nominal Dimensions .

	SPECS	TEST METHOD	INDUSTRY STANDARD	AUTOSTONE VALUES
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42% WET	≥0.42% WET
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED
	BREAKING STRENGTH	ASTM C648	≥250 lb/ft <sup>2</sup>	8mm ≥300 lb/ft <sup>2</sup> 10mm ≥400 lb/ft <sup>2</sup>
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT
	WARPAGE EDGE	ASTM C485	Warpage ± 0.4% or ± 0.05 in	≥± 0.4%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.4% or ± 0.07 in	≥± 0.4%
	WARPAGE EDGE	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WARPAGE DIAGONAL	ASTM C485	Warpage ± 0.5% or ± 0.07 in	≥± 0.5%
	WEDGING	ASTM C502	± 0.25% or ± 0.03 in	≥± 0.25%
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# The AutoStoneUSA Honda Team



General and immediate online help.  
You can find most information including quotes  
on our Honda Brand Webpage



**Made In USA**



Please send all requests for pricing to:

[honda@autostoneusa.com](mailto:honda@autostoneusa.com)

214-393-4875 (phone)



Here is the link to Honda Brand Materials:

<https://autostoneusa.com/honda/>



Madison Wilson  
Executive Sales Support &  
Project Coordinator  
214-393-4868 direct dial  
madison@autostoneusa.com

**autostone  
usa**



Barry Wells  
President, Owner, Founder  
214-393-4862 direct dial  
214-830-1206 mobile  
barry@autostoneusa.com

**autostone  
usa**